

# Little Hamlets – Kingswood Plus



## A toddler modular tower system comprising of:

- 3 x Square Tower (0.55m)
- Square Tower (0.9m)
- Angled Tower (1.25m)
- Triangular Lookout Tower (1.25m)
- Slide (0.55m)
- Slide (1.25m)
- Ladder (0.55m)
- Ladder (0.9m)
- Ramp Climber (0.9m)
- Adding Wheel Play Panel
- Animal Home Trail Play Panel
- Transfer Platform Arched Net (0.55m)
- Arched Ramp (0.55m)
- Arched Net Climber (1.25m)
- Inclined Bridge
- Curved Bridge
- Inclined Net Traverse
- Tunnel Swing Bar
- Playhouse
- 2 x Pod Seating
- Bubble Play Panel
- Counter Play Panel

## Code – LTH/KGS/\*2

### Age

2-5 years

### Materials

Laminated Timber  
Compact Grade Laminate (CGL)  
Galvanised or Painted Mild Steel  
Nylon Steel Cored Rope  
Stainless Steel Slide  
Stainless Steel  
Sawn Timber  
Various Plastic Mouldings

## Technical Information

### Equipment Dimensions

Length / Width / Height **6.8m x 6.8m x 2.6m**

### Surfacing and Area Required

Recommended Minimum Space  
L/W/H **10.2m x 10.3m x 3.9m**

Max Gradient of Ground **1 in 50**

Free Height of Fall **1.25m**

Impact Area **59.3m<sup>2</sup>**

Synthetic Area  
(i.e. EPDM / Wet Pour / Synthetic Grass etc.) **56.28m<sup>2</sup>**

Loosefill at 250mm  
(i.e. Bark / Cushionfall / Sand) **18m<sup>3</sup>**

GrassLok Tiles **75m<sup>2</sup>**

### Installation Information

Steel Ground Fixed

Surface Fixed  
(if different)

Installation Time **2 Person(s) 22 Hour(s)**

Overall Weight **808kg**

Heaviest Part **23kg**

Largest Part **2.7m x 0.4m x 0.2m**



Longest Part **2.7m**

Concrete Required **1.8m<sup>3</sup>**

Certified to EN 1176

[Click here for more information & downloads](#)



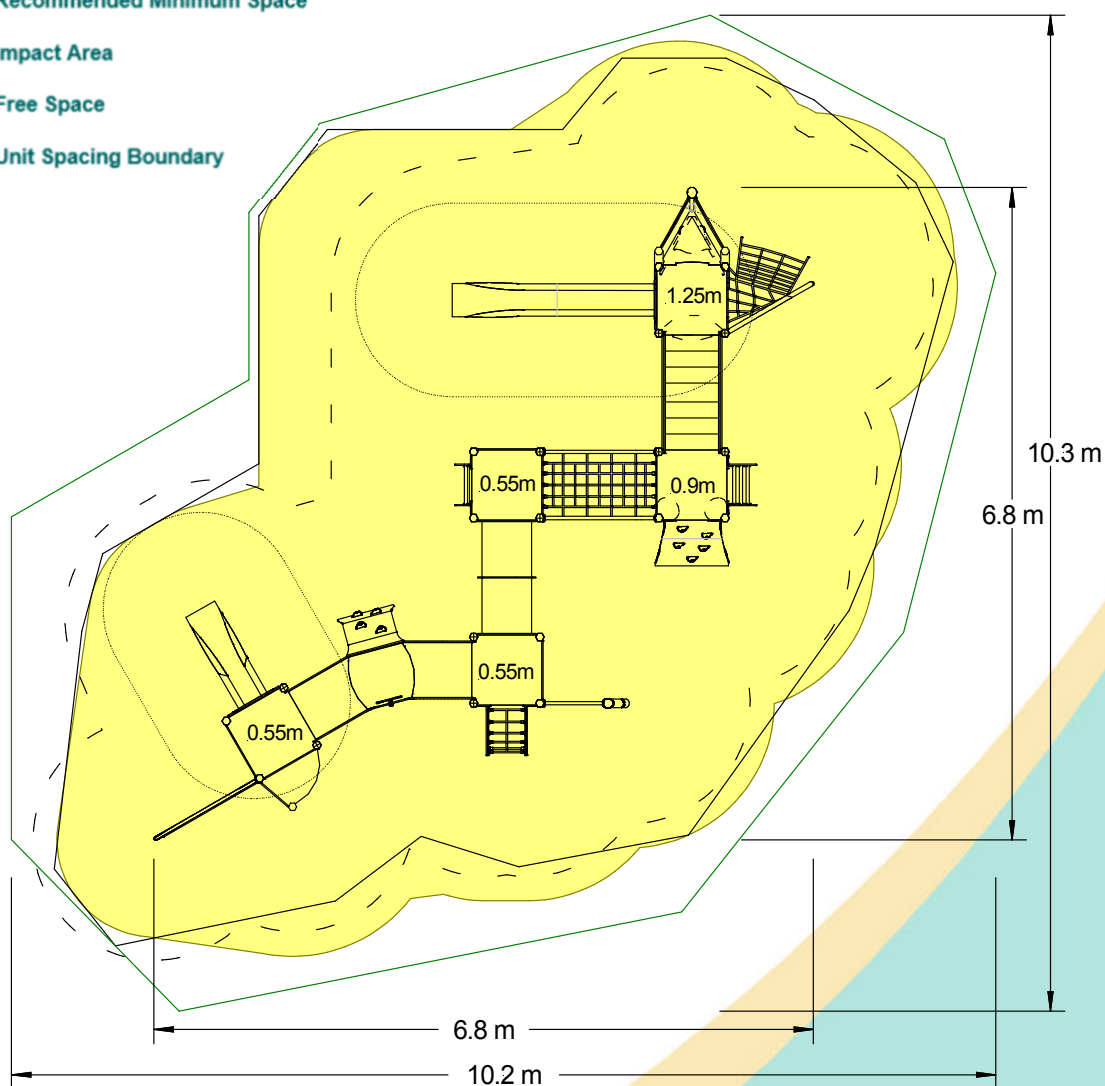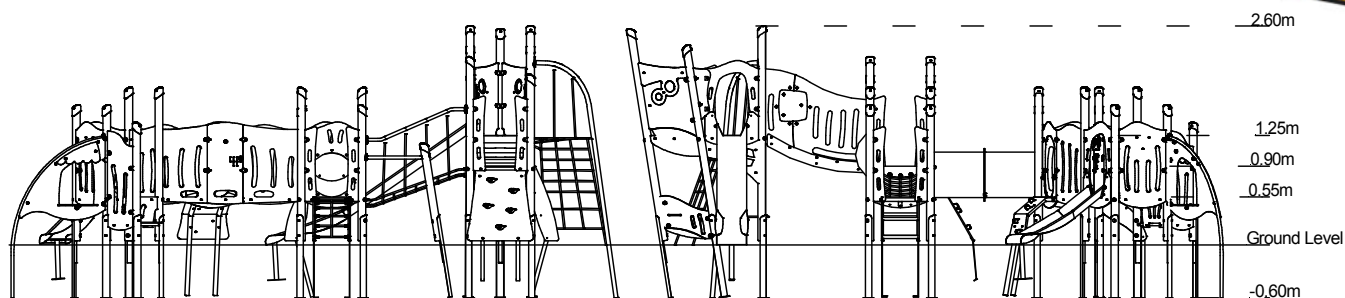

[Click here for more information & downloads](#)