

Versatile Embankment Slide Plastic Tube Slide [EM-PT]

Contents

[Versatile Embankment Slide - Tower 0.7m High \[EM-TW0.70\]](#)

[Versatile Embankment Slide - Tower 1.1m High \[EM-TW1.10\]](#)

[Versatile Embankment Slide - Tower 1.5m High \[EM-TW1.50\]](#)

[Versatile Embankment Slide - Plastic Tube 1.1m High \[EM-PT1.10\]](#)

[Versatile Embankment Slide - Plastic Tube 1.3m High \[EM-PT1.30\]](#)

[Versatile Embankment Slide - Plastic Tube 1.5m High \[EM-PT1.50\]](#)

[Versatile Embankment Slide - Plastic Tube 1.7m High \[EM-PT1.70\]](#)

[Versatile Embankment Slide - Plastic Tube 1.9m High \[EM-PT1.90\]](#)

[Versatile Embankment Slide - Plastic Tube 2.1m High \[EM-PT2.10\]](#)

[Versatile Embankment Slide - Plastic Tube 2.3m High \[EM-PT2.30\]](#)

[Versatile Embankment Slide - Plastic Tube 2.5m High \[EM-PT2.50\]](#)

[Versatile Embankment Slide - Plastic Tube 2.7m High \[EM-PT2.70\]](#)

[Versatile Embankment Slide - Plastic Tube 2.9m High \[EM-PT2.90\]](#)

[Versatile Embankment Slide - Plastic Tube 3.1m High \[EM-PT3.10\]](#)

Versatile Embankment Slide

- Tower 0.7m High



Code - EM-TW(0.70)

Age

2-12 years dependent on frame height and slide length

Materials

Stainless Steel

Coloured CGL

Various Coloured Plastics

Product Description

Stainless Steel frame with CGL side panels and platform supported by solid stainless steel adjustable post. Innovative hand and foot steps made from textured CGL are attached to the adjustable post.

Technical Information

Equipment Dimensions

Length / Width / Height 0.7m x 1.04m x 0.5m

Surfacing and Area Required

Recommended Minimum Space L/W/H 4.4m x 4.7m x 3.2m

Max Gradient of Ground 1 in 5 at tower access

Free Height of Fall 0.7m

Impact Area 11.8m²

Synthetic Area (i.e. EPDM / Wet Pour / Synthetic Grass etc.) 11.8m²

Loosefill at 150mm depth (i.e. Bark / Cushionfall / Sand) 3m³

GrassLok Tiles (wear & tear) 2m²

Installation Information

SGF

Installation Time 2 Person(s) 1.5 Hour(s)

Overall Weight 73.5kg

Heaviest Part 13.8kg

Largest Part 0.48m x 1.04m x 0.04m



Longest Part 1.1m

Concrete Required 0.33m³

Conforms to EN 1176

[Click here for more information & downloads](#)



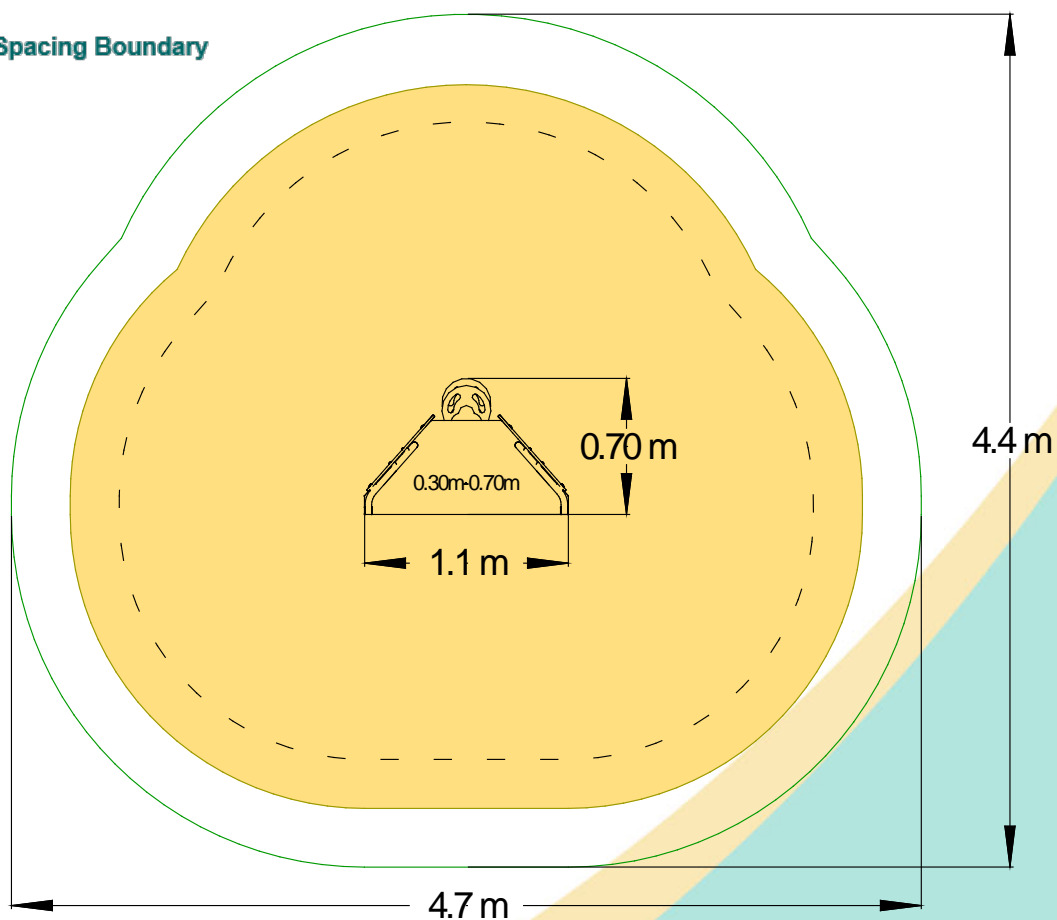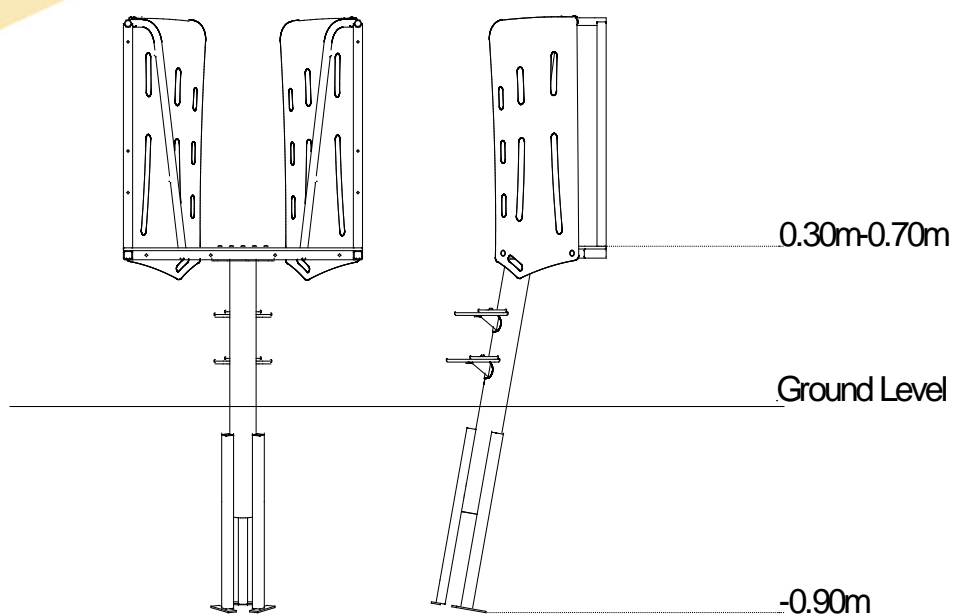

[Click here for more information & downloads](#) 

Versatile Embankment Slide

- Tower 1.1m High



Code - EM-TW(1.10)

Age

2-12 years dependent on frame height and slide length

Materials

Stainless Steel

Coloured CGL

Various Coloured Plastics

Product Description

Stainless Steel frame with CGL side panels and platform supported by solid stainless steel adjustable post. Innovative hand and foot steps made from textured CGL are attached to the adjustable post.

Technical Information

Equipment Dimensions

Length / Width / Height 1.1m x 1.04m x 0.5m

Surfacing and Area Required

Recommended Minimum Space L/W/H 4.4m x 4.7m x 3.6m

Max Gradient of Ground 1 in 5 at tower access

Free Height of Fall 1.1m

Impact Area 12m²

Synthetic Area (i.e. EPDM / Wet Pour / Synthetic Grass etc.) 12m²

Loosefill at 250mm depth (i.e. Bark / Cushionfall / Sand) 4m³

GrassLok Tiles (wear & tear) 2m²

Installation Information

SGF

Installation Time 2 Person(s) 1.5 Hour(s)

Overall Weight 79.5kg

Heaviest Part 16.4kg

Largest Part 0.48m x 1.04m x 0.04m



Longest Part 1.5m

Concrete Required 0.33m³

Conforms to EN 1176

[Click here for more information & downloads](#)



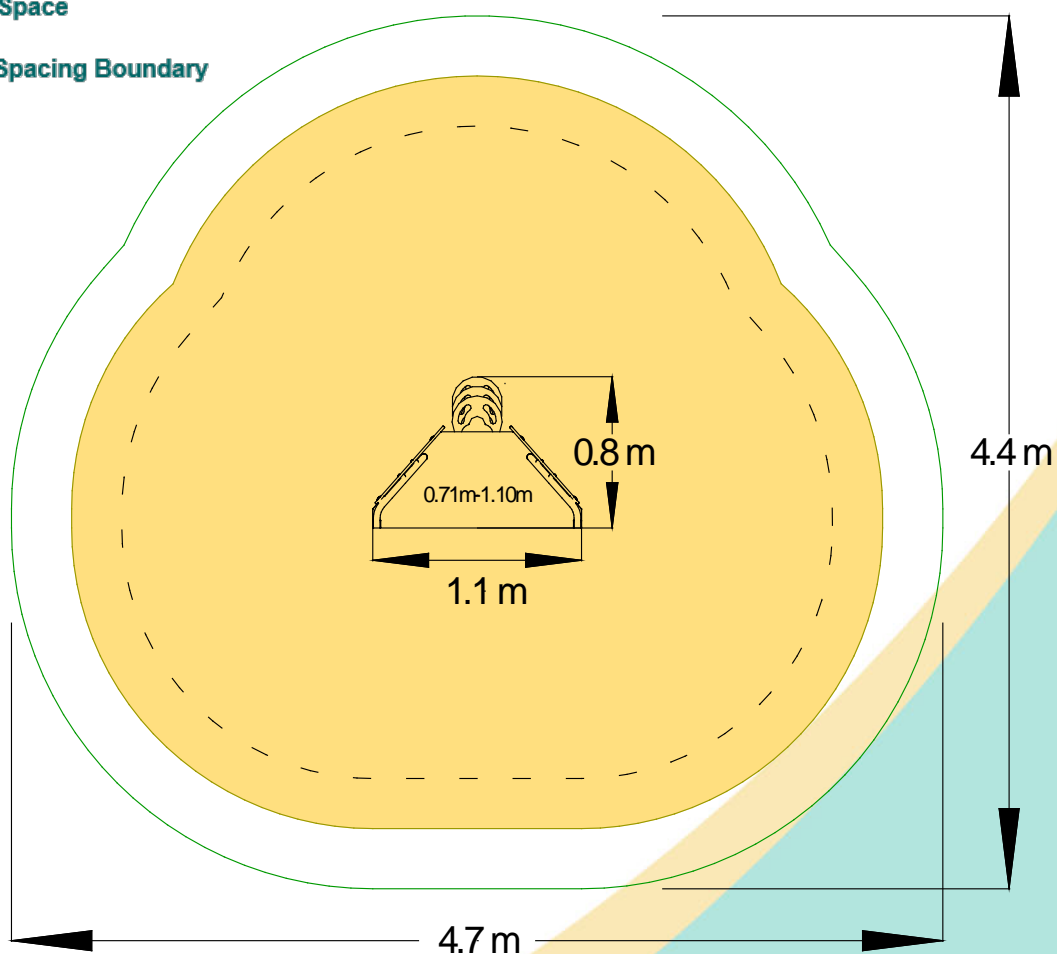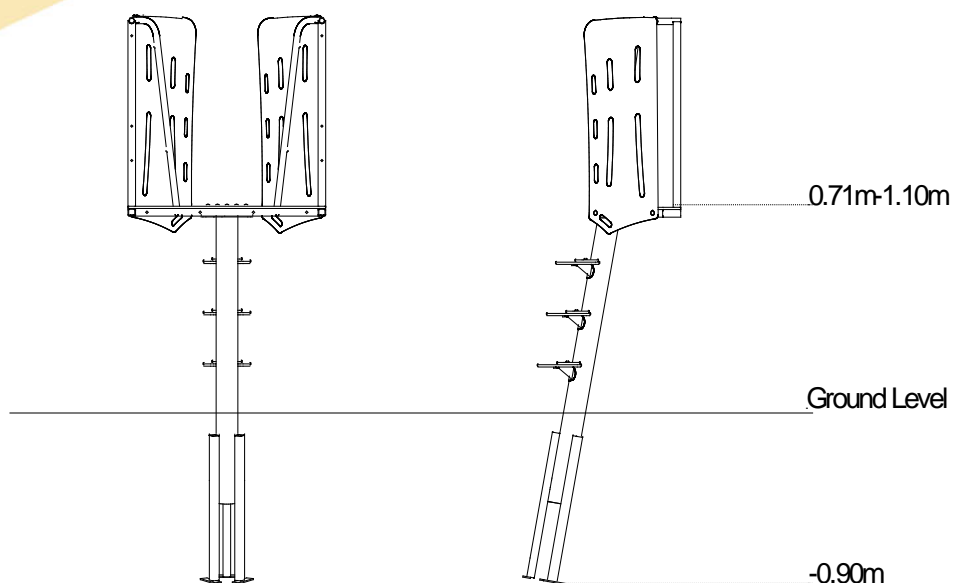


[Click here for more information & downloads](#)



Versatile Embankment Slide

- Tower 1.5m High

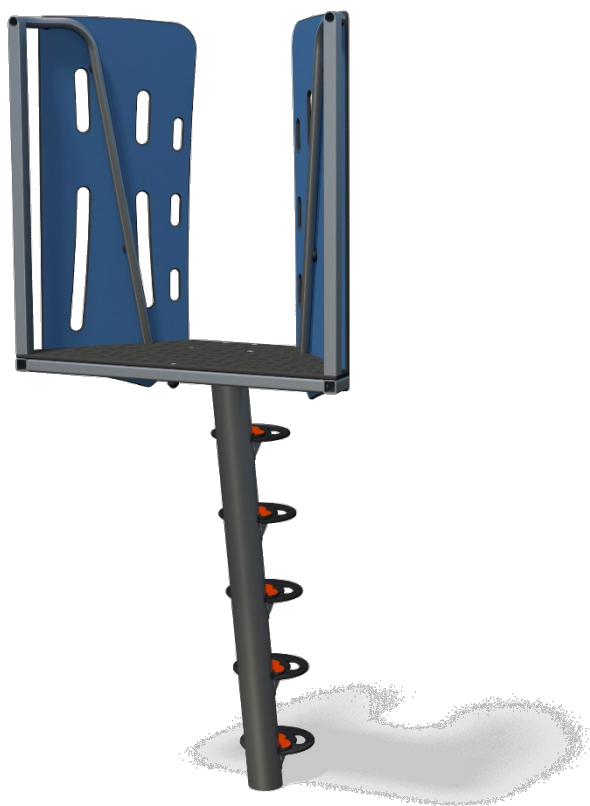

Code - EM-TW(1.50)

Age

2-12 years dependent on frame height and slide length

Materials

Stainless Steel

Coloured CGL

Various Coloured Plastics

Product Description

Stainless Steel frame with CGL side panels and platform supported by solid stainless steel adjustable post. Innovative hand and foot steps made from textured CGL are attached to the adjustable post.

Technical Information

Equipment Dimensions

Length / Width / Height 1.5m x 1.04m x 0.5m

Surfacing and Area Required

Recommended Minimum Space L/W/H 4.4m x 4.7m x 4.0m

Max Gradient of Ground 1 in 5 at tower access

Free Height of Fall 1.5m

Impact Area 12.3m²

Synthetic Area (i.e. EPDM / Wet Pour / Synthetic Grass etc.) 12.3m²

Loosefill at 250mm depth (i.e. Bark / Cushionfall / Sand) 4m³

GrassLok Tiles (wear & tear) 2m²

Installation Information

SGF

Installation Time 2 Person(s) 1.5 Hour(s)

Overall Weight 87.8kg

Heaviest Part 20.5kg

Largest Part 0.48m x 1.04m x 0.04m


Longest Part 1.9m

Concrete Required 0.33m³


Conforms to EN 1176

[Click here for more information & downloads](#)



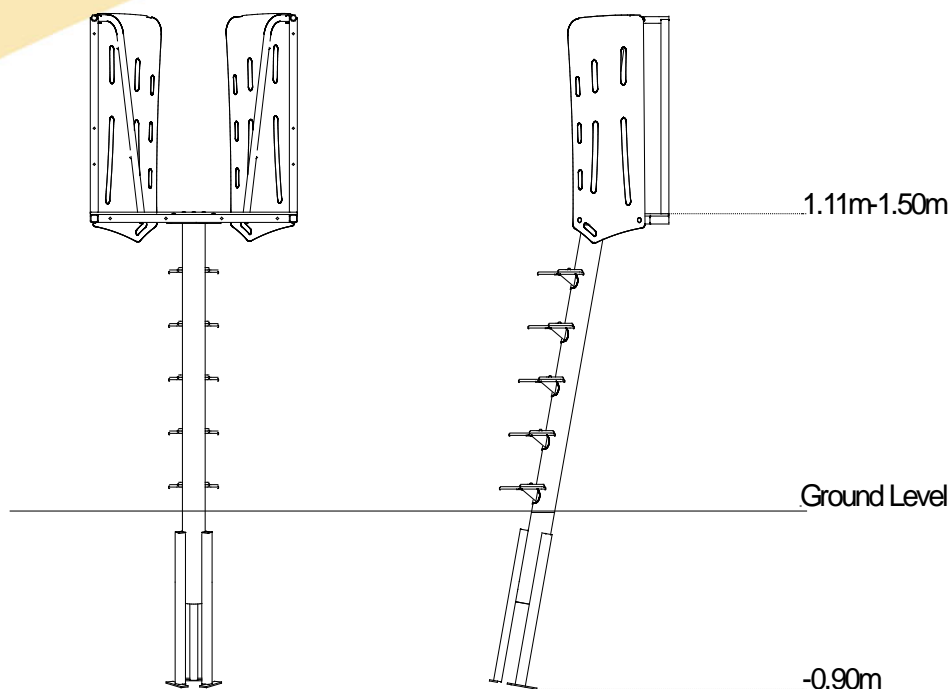


-  Recommended Minimum Space
-  Impact Area
-  Free Space
-  Unit Spacing Boundary

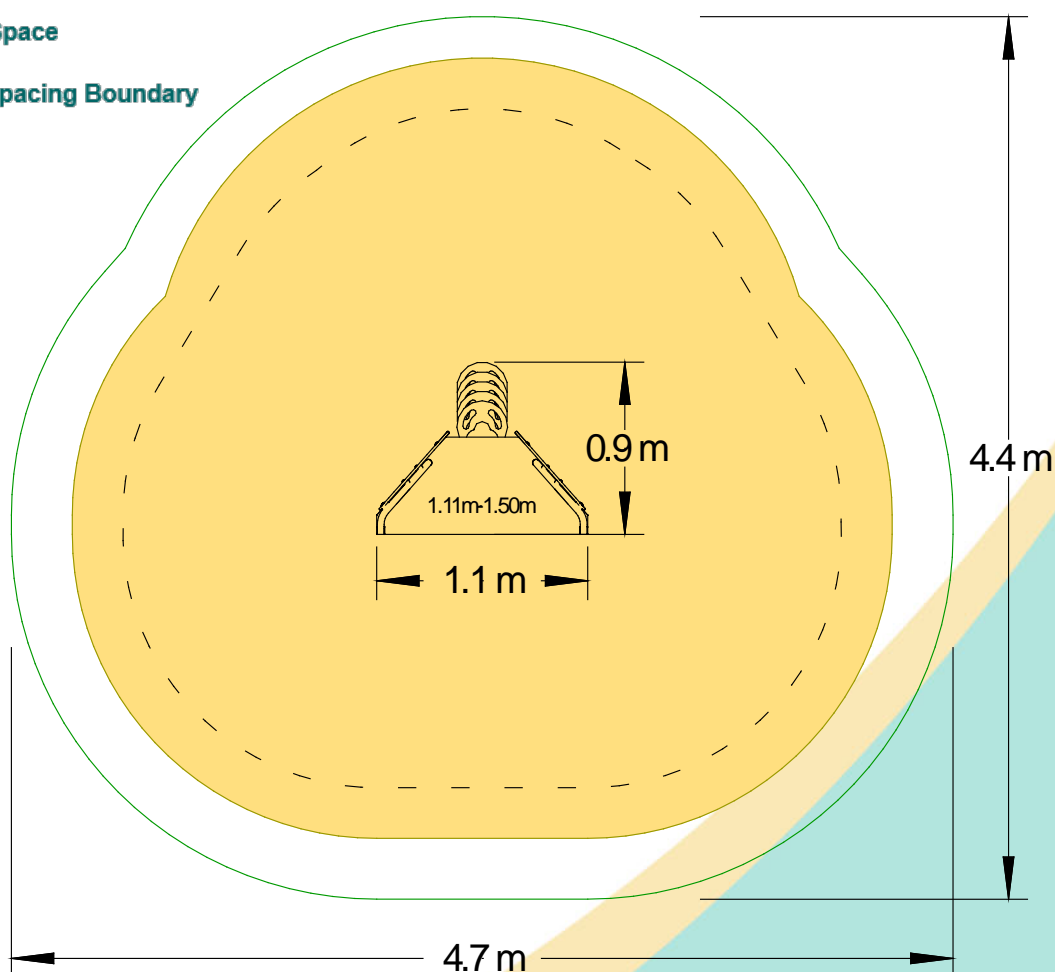

[Click here for more information & downloads](#) 

Versatile Embankment Slide

- Plastic Tube 1.1m High

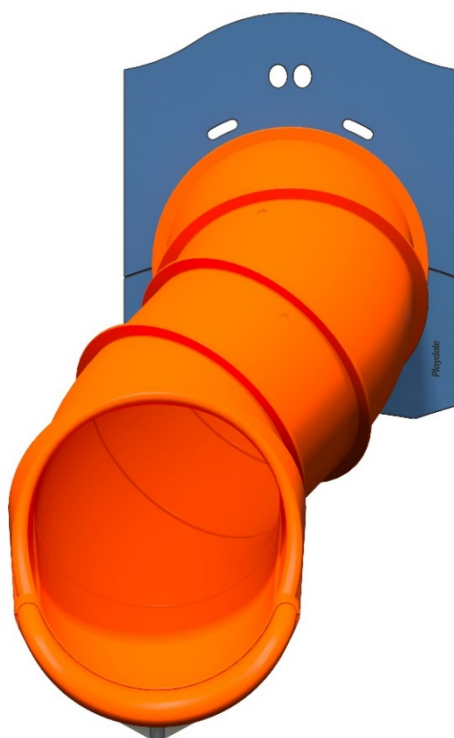

Code - EM-PT(1.10)

Age

2-12 years dependent on frame height and slide length

Materials

Stainless Steel

Coloured CGL

Various Coloured Plastics

Product Description

LLDPE plastic tube slide mounted to a coloured CGL frame, side panels and platform supported by solid stainless steel adjustable post. Innovative hand and foot steps made from textured CGL are attached to the adjustable post.

Technical Information

Equipment Dimensions

Length / Width / Height 2.1m x 1.9m x 1.0m

Surfing and Area Required

Recommended Minimum Space L/W/H 2.8m x 4.5m x height dependant on tower used

Max Gradient of Ground 1 in 5 at runout

Free Height of Fall 1.0m at runout

Impact Area 7.4m²

Synthetic Area (i.e. EPDM / Wet Pour / Synthetic Grass etc.) 7.5m²

Loosefill at 150mm depth (i.e. Bark / Cushionfall / Sand) 2m³

GrassLok Tiles (wear & tear) 4m²

Installation Information

SGF

Installation Time 2 Person(s) 1.5 Hour(s)

Overall Weight 156.8kg

Heaviest Part 134.8kg

Largest Part 1.9m x 1.8m x 0.7m


Longest Part 1.9m

Concrete Required 0.1m³


Conforms to EN 1176

[Click here for more information & downloads](#)



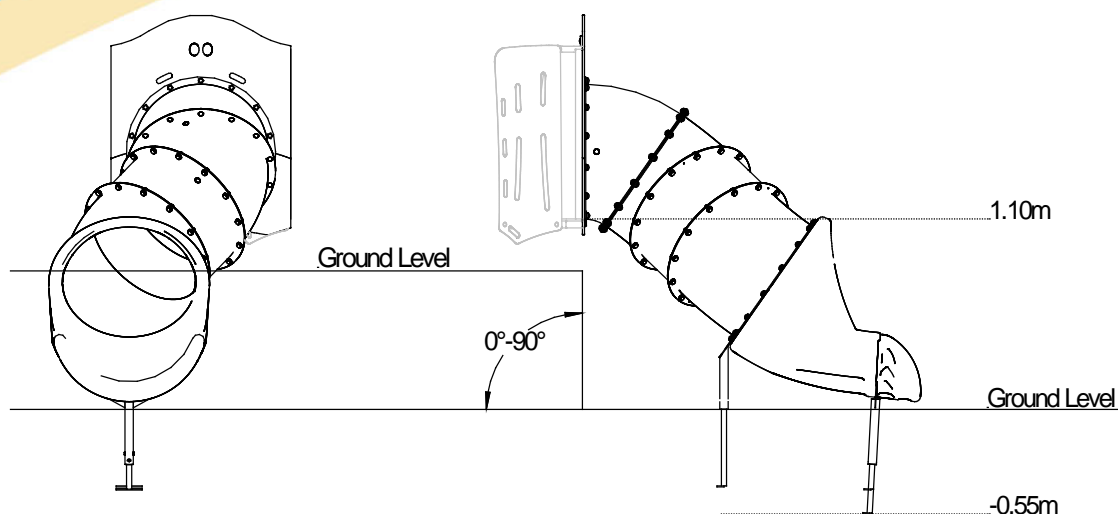

-  **Recommended Minimum Space**
-  **Impact Area**
-  **Free Space**
-  **Unit Spacing Boundary**

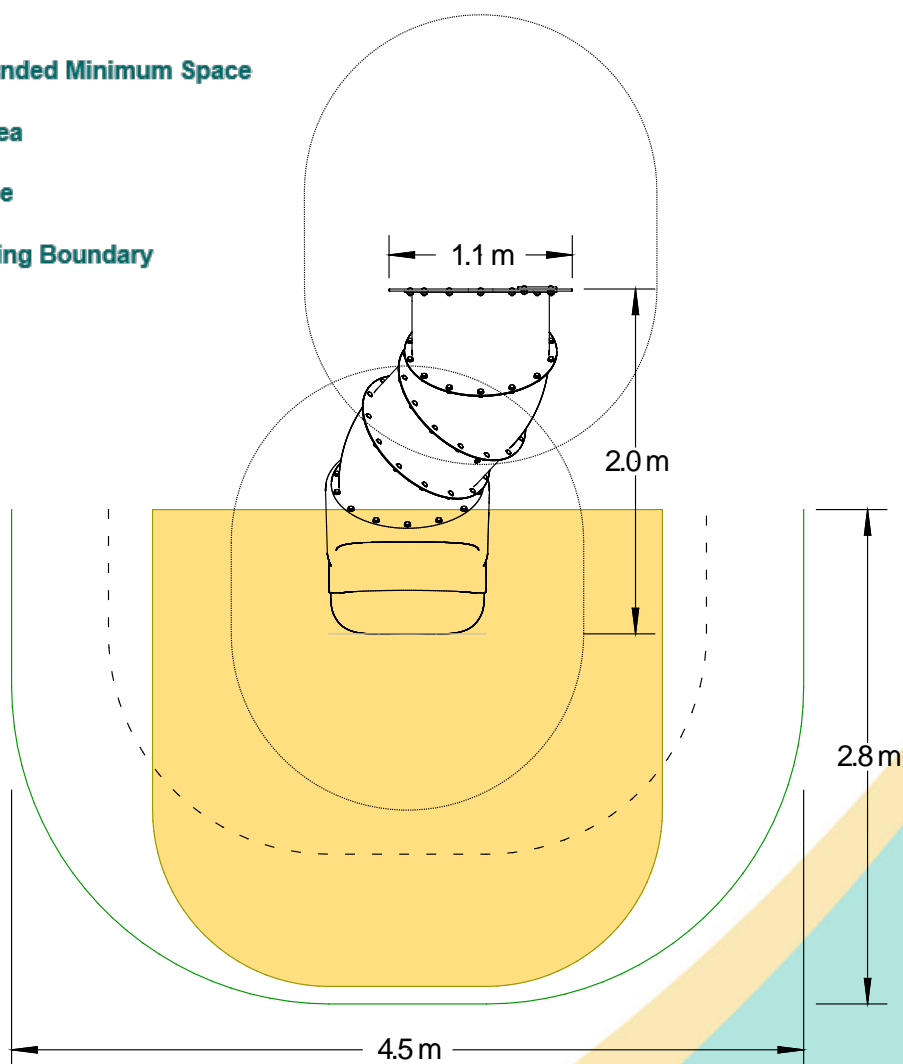


[Click here for more information & downloads](#)



Versatile Embankment Slide

- Plastic Tube 1.3m High

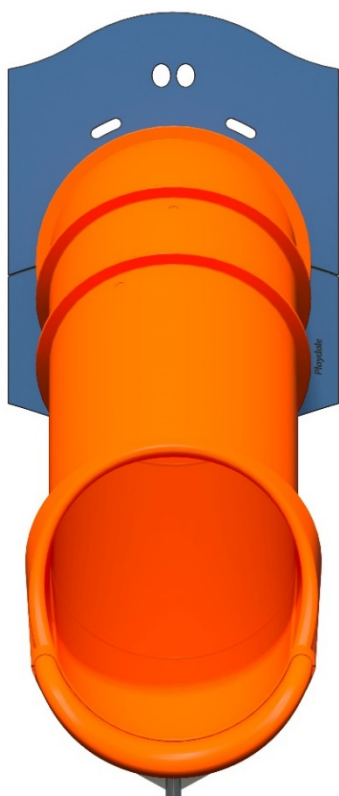

Code - EM-PT(1.30)

Age

2-12 years dependent on frame height and slide length

Materials

Stainless Steel

Coloured CGL

Various Coloured Plastics

Product Description

LLDPE plastic tube slide mounted to a coloured CGL frame, side panels and platform supported by solid stainless steel adjustable post. Innovative hand and foot steps made from textured CGL are attached to the adjustable post.

Technical Information

Equipment Dimensions

Length / Width / Height 2.3m x 2.2m x 1.0m

Surfacing and Area Required

Recommended Minimum Space L/W/H 2.8m x 4.5m x height dependant on tower used

Max Gradient of Ground 1 in 5 at runout

Free Height of Fall 1.0m at runout

Impact Area 7.4m²

Synthetic Area (i.e. EPDM / Wet Pour / Synthetic Grass etc.) 7.5m²

Loosefill at 150mm depth (i.e. Bark / Cushionfall / Sand) 2m³

GrassLok Tiles (wear & tear) 4m²

Installation Information

SGF

Installation Time 2 Person(s) 1.5 Hour(s)

Overall Weight 162.5kg

Heaviest Part 140.5kg

Largest Part 2.3m x 2.0m x 0.7m



Longest Part 2.3m

Concrete Required 0.1m³

Conforms to EN 1176

[Click here for more information & downloads](#)



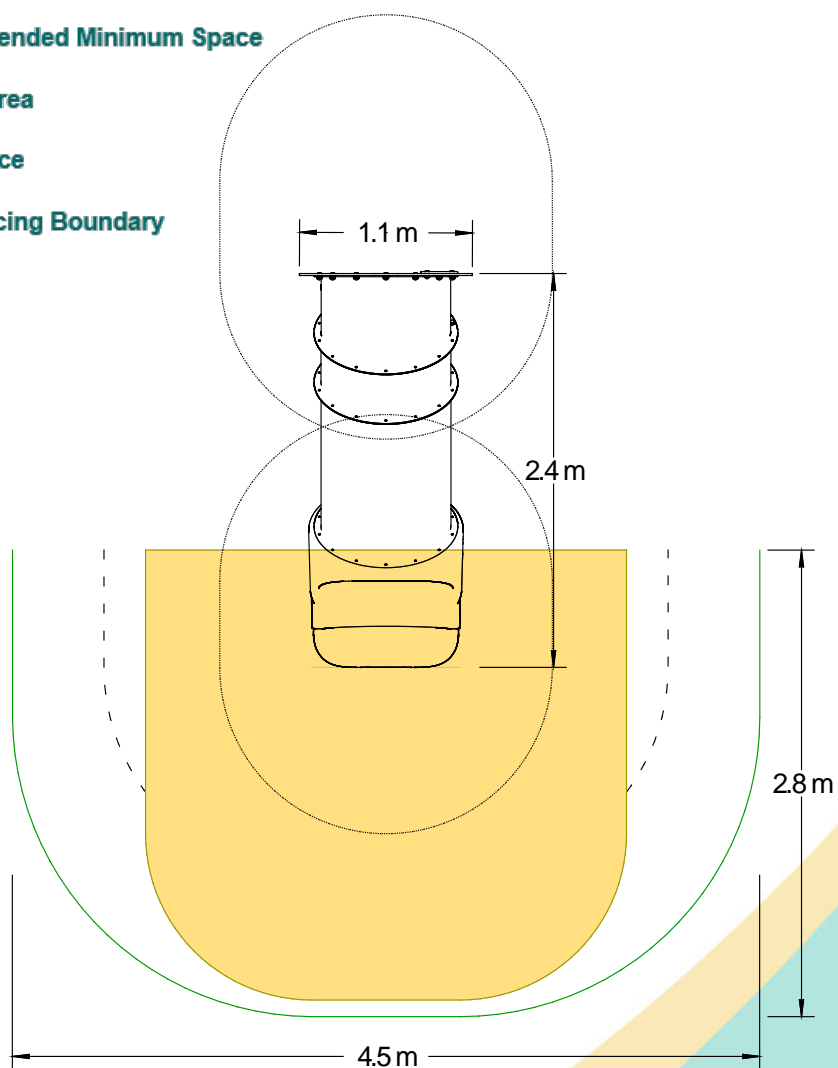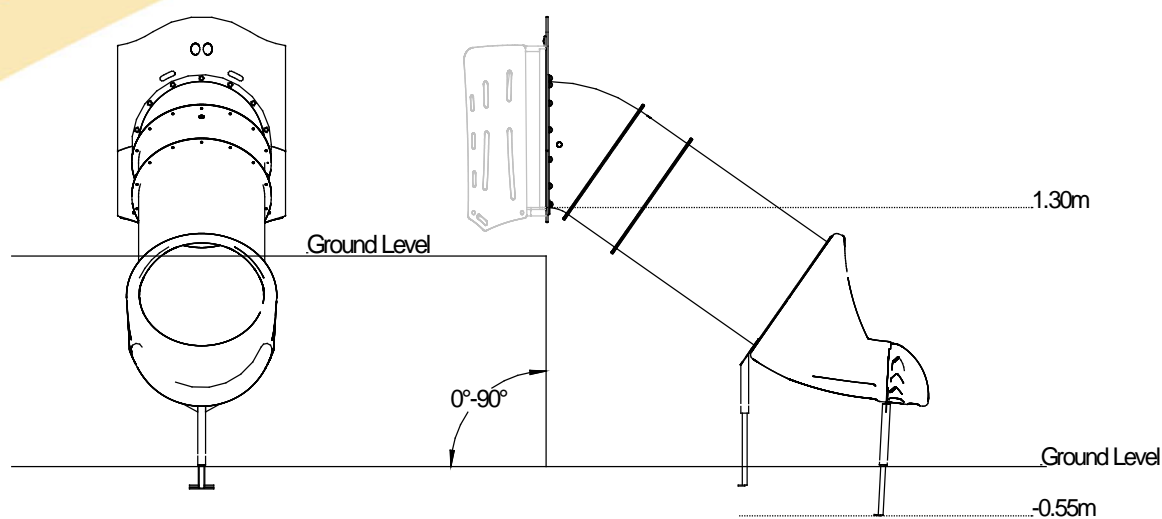

[Click here for more information & downloads](#)



Versatile Embankment Slide

- Plastic Tube 1.5m High



Code - EM-PT(1.50)

Age

2-12 years dependent on height and slide length

Materials

Stainless Steel

Coloured CGL

Various Coloured Plastics

Product Description

LLDPE plastic tube slide mounted to a coloured CGL frame, side panels and platform supported by solid stainless steel adjustable post. Innovative hand and foot steps made from textured CGL are attached to the adjustable post.

Technical Information

Equipment Dimensions

Length / Width / Height 2.3m x 2.2m x 1.0m

Surfacing and Area Required

Recommended Minimum Space L/W/H 2.8m x 4.5m x height dependant on tower used

Max Gradient of Ground 1 in 5 at runout

Free Height of Fall 1.0m at runout

Impact Area 7.4m²

Synthetic Area (i.e. EPDM / Wet Pour / Synthetic Grass etc.) 7.5m²

Loosefill at 150mm depth 2m³

(i.e. Bark / Cushionfall / Sand)

GrassLok Tiles (wear & tear) 4m²

Installation Information

SGF

Installation Time 2 Person(s) 1.5 Hour(s)

Overall Weight 162.8kg

Heaviest Part 139.5kg

Largest Part 2.2m x 2.0m x 0.7m



Longest Part 2.2m

Concrete Required 0.1m³

Conforms to EN 1176

[Click here for more information & downloads](#)



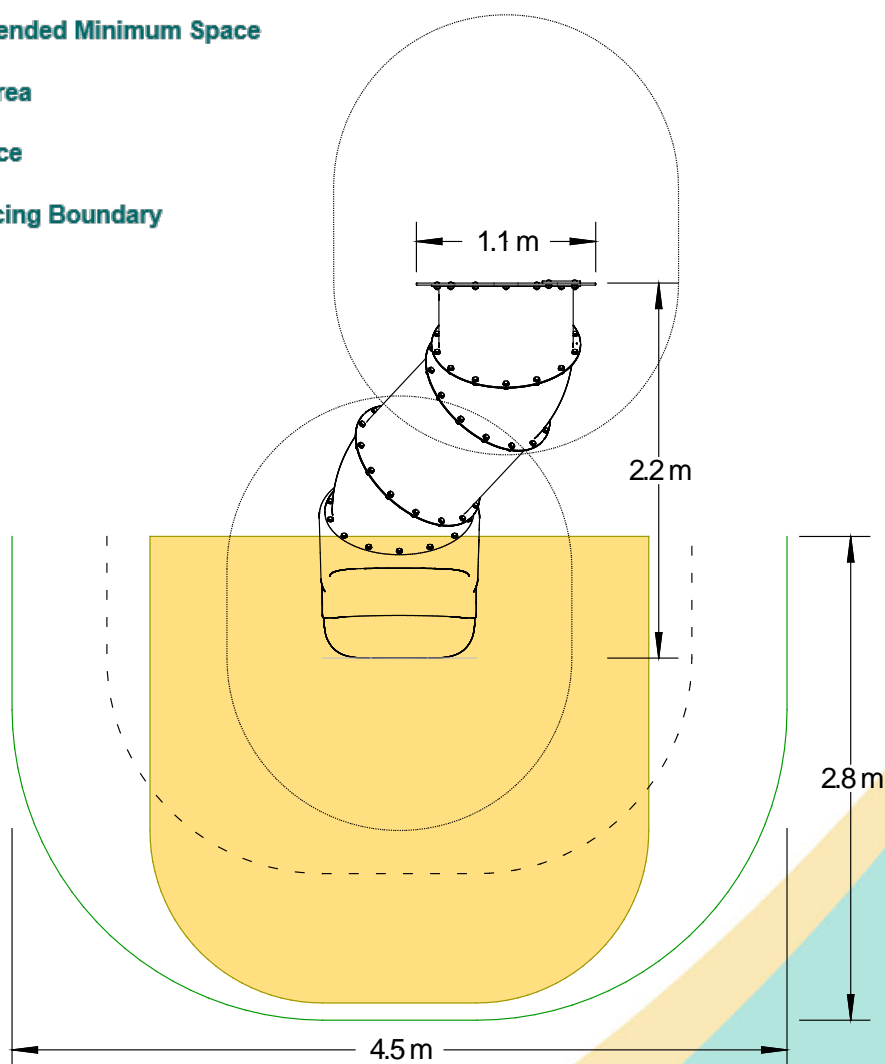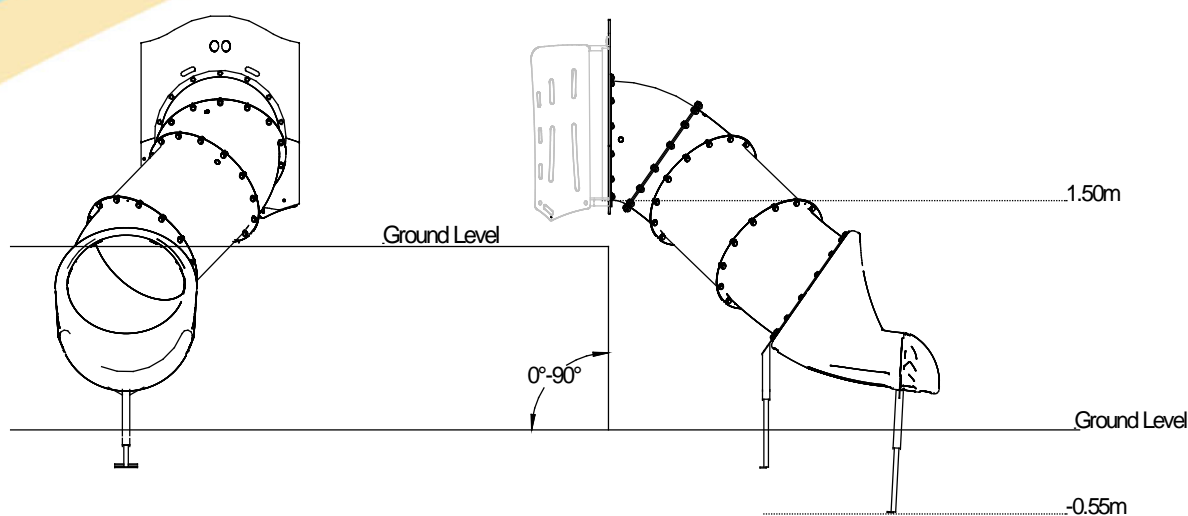


[Click here for more information & downloads](#)



Versatile Embankment Slide

- Plastic Tube 1.7m High

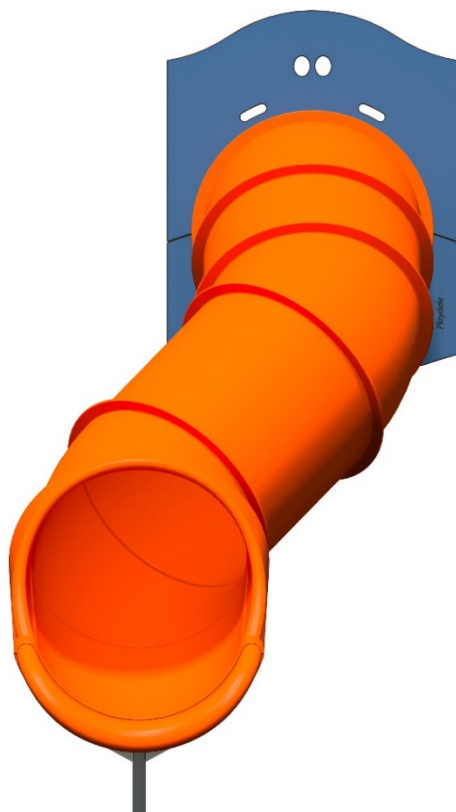

Code - EM-PT(1.70)

Age

2-12 years dependent on frame height and slide length

Materials

Stainless Steel

Coloured CGL

Various Coloured Plastics

Product Description

LLDPE plastic tube slide mounted to a coloured CGL frame, side panels and platform supported by solid stainless steel adjustable post. Innovative hand and foot steps made from textured CGL are attached to the adjustable post.

Technical Information

Equipment Dimensions

Length / Width / Height 2.5m x 2.4m x 1.0m

Surfacing and Area Required

Recommended Minimum Space L/W/H 2.9m x 4.5m x height dependant on tower used

Max Gradient of Ground 1 in 5 at runout

Free Height of Fall 1.0m at runout

Impact Area 7.4m²

Synthetic Area (i.e. EPDM / Wet Pour / Synthetic Grass etc.) 7.5m²

Loosefill at 150mm depth (i.e. Bark / Cushionfall / Sand) 2m³

GrassLok Tiles (wear & tear) 4m²

Installation Information

SGF

Installation Time 2 Person(s) 1.5 Hour(s)

Overall Weight 171.6kg

Heaviest Part 148.5kg

Largest Part 2.4m x 2.2m x 0.7m


Longest Part 2.4m

Concrete Required 0.1m³


Conforms to EN 1176

[Click here for more information & downloads](#)



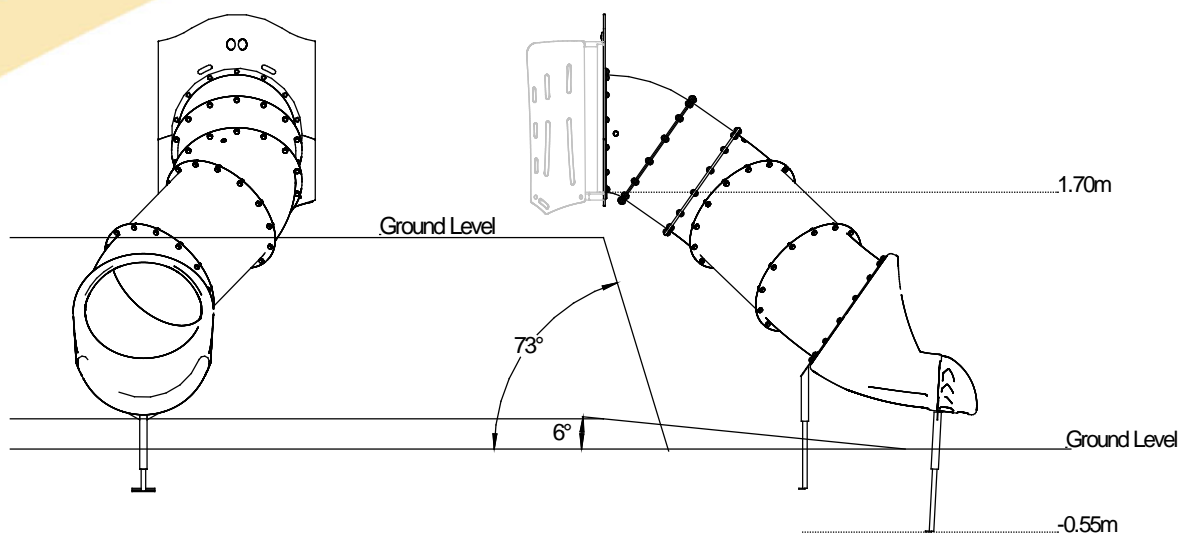

-  **Recommended Minimum Space**
-  **Impact Area**
-  **Free Space**
-  **Unit Spacing Boundary**

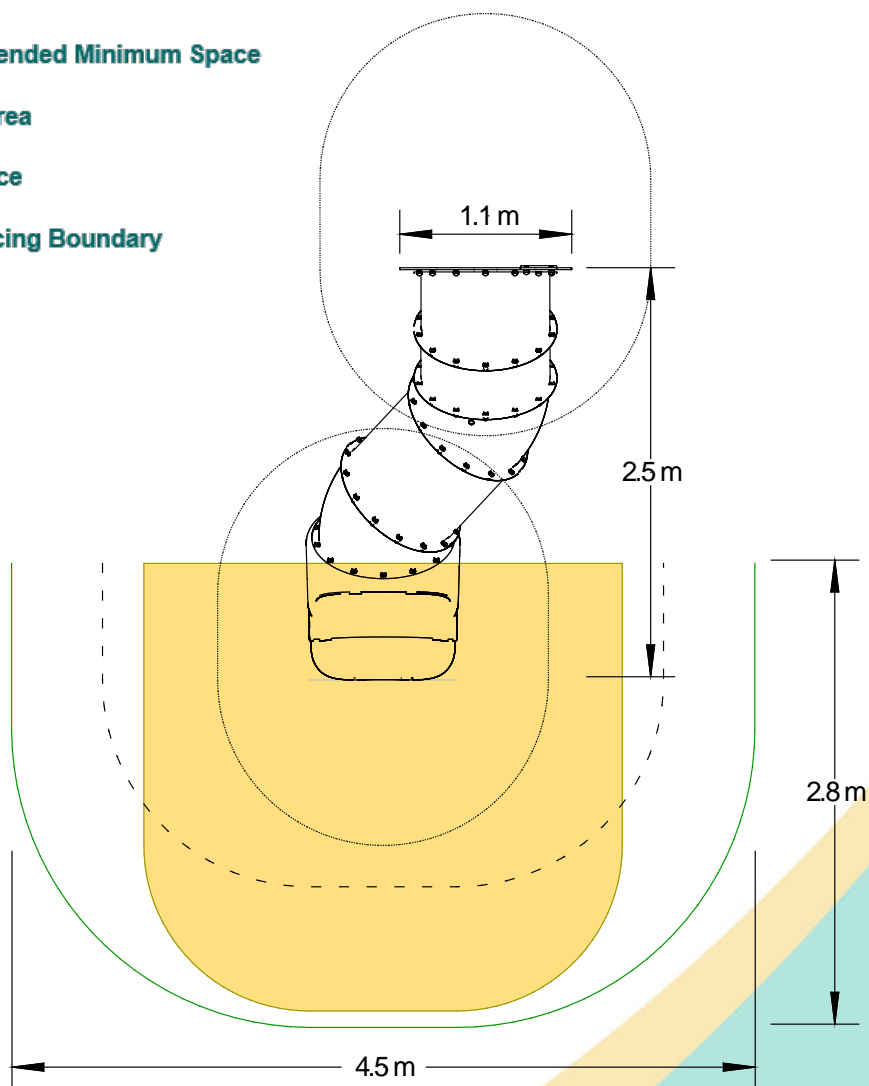


[Click here for more information & downloads](#)



Versatile Embankment Slide

- Plastic Tube 1.9m High

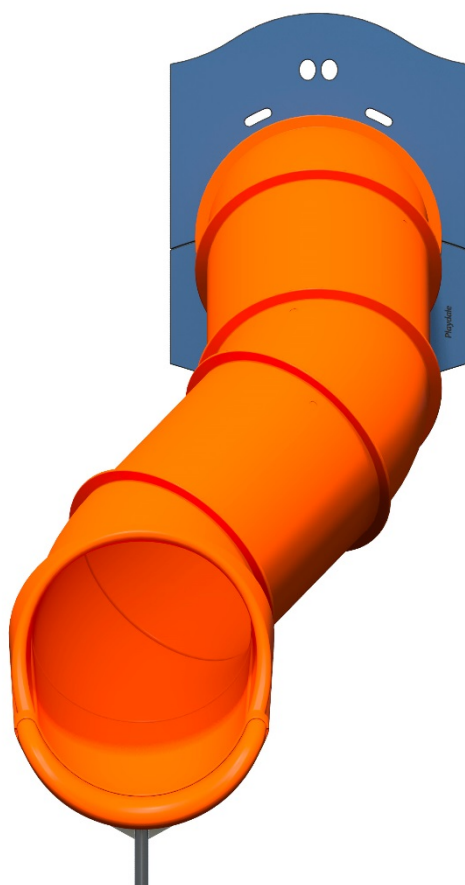

Code - EM-PT(1.90)

Age

2-12 years dependent on frame height and slide length

Materials

Stainless Steel

Coloured CGL

Various Coloured Plastics

Product Description

LLDPE plastic tube slide mounted to a coloured CGL frame, side panels and platform supported by solid stainless steel adjustable post. Innovative hand and foot steps made from textured CGL are attached to the adjustable post.

Technical Information

Equipment Dimensions

Length / Width / Height 2.9m x 2.6m x 1.0m

Surfacing and Area Required

Recommended Minimum Space L/W/H 2.9m x 4.5m x height dependant on tower used

Max Gradient of Ground 1 in 5 at runout

Free Height of Fall 1.0m at runout

Impact Area 7.4m²

Synthetic Area (i.e. EPDM / Wet Pour / Synthetic Grass etc.) 7.5m²

Loosefill at 150mm depth (i.e. Bark / Cushionfall / Sand) 2m³

GrassLok Tiles (wear & tear) 4m²

Installation Information

SGF

Installation Time 2 Person(s) 1.5 Hour(s)

Overall Weight 176.9kg

Heaviest Part 154.4kg

Largest Part 2.6m x 2.3m x 0.7m


Longest Part 2.6m

Concrete Required 0.1m³


Conforms to EN 1176

[Click here for more information & downloads](#)



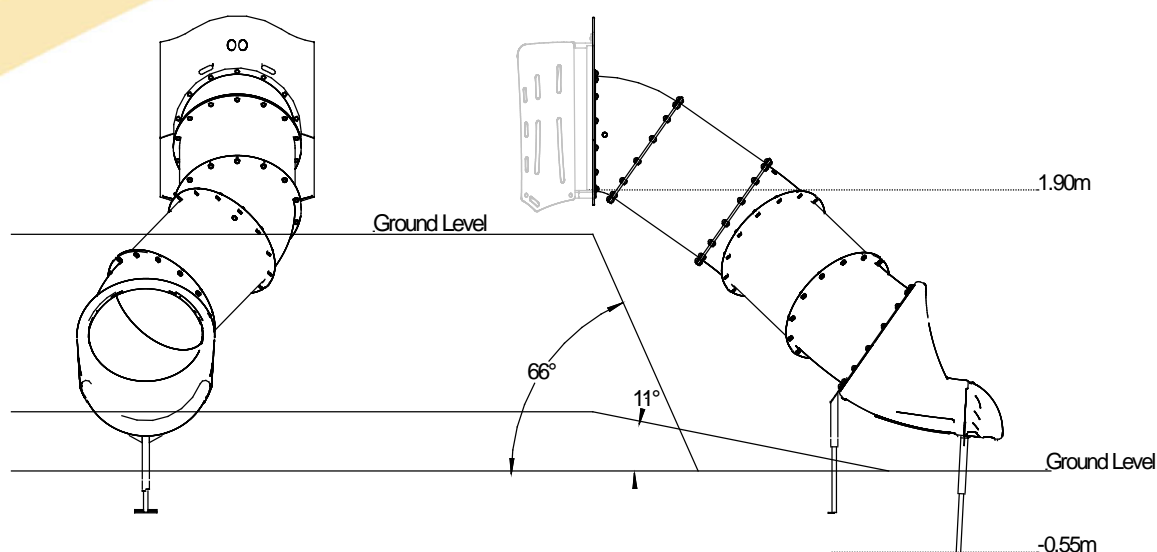

-  Recommended Minimum Space
-  Impact Area
-  Free Space
-  Unit Spacing Boundary

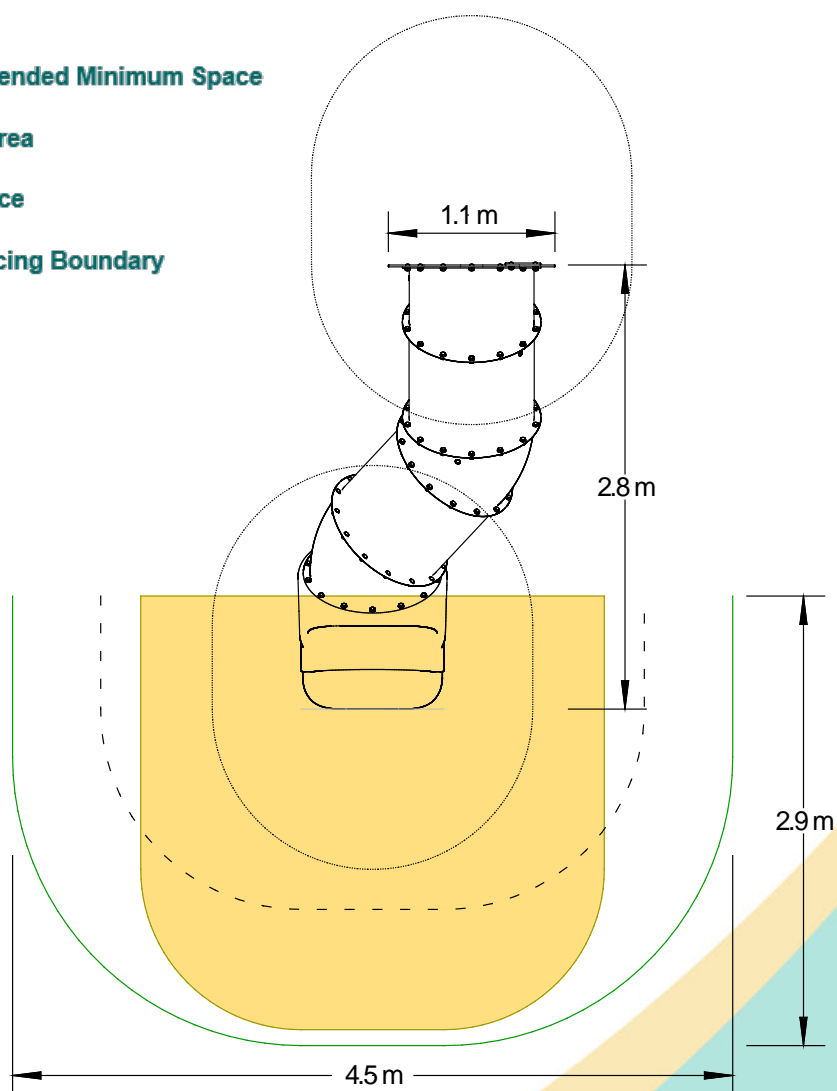


[Click here for more information & downloads](#)



Versatile Embankment Slide

- Plastic Tube 2.1m High

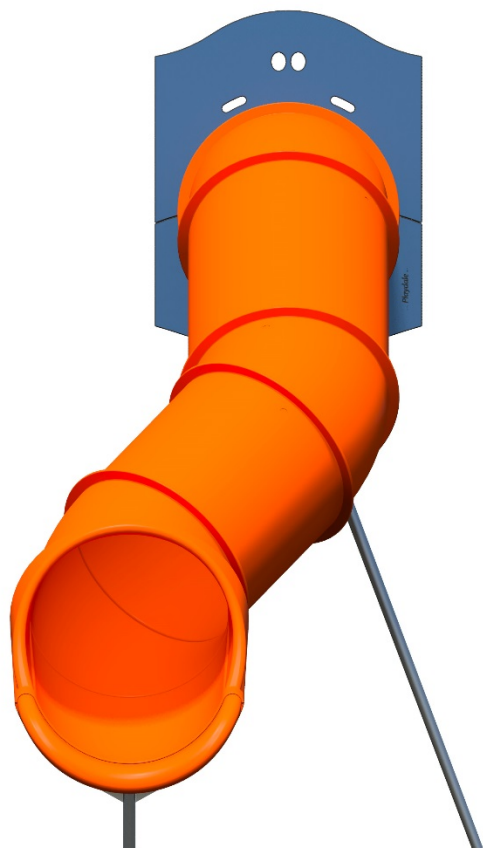

Code - EM-PT(2.10)

Age

2-12 years dependent on frame height and slide length

Materials

Stainless Steel

Coloured CGL

Various Coloured Plastics

Product Description

LLDPE plastic tube slide mounted to a coloured CGL frame, side panels and platform supported by solid stainless steel adjustable post. Innovative hand and foot steps made from textured CGL are attached to the adjustable post.

Technical Information

Equipment Dimensions

Length / Width / Height 3.2m x 3.0m x 1.0m

Surfacing and Area Required

Recommended Minimum Space L/W/H 2.9m x 4.8m x height dependant on tower used

Max Gradient of Ground 1 in 5 at runout

Free Height of Fall 1.0m at runout

Impact Area 7.4m²

Synthetic Area (i.e. EPDM / Wet Pour / Synthetic Grass etc.) 7.5m²

Loosefill at 150mm depth (i.e. Bark / Cushionfall / Sand) 2m³

GrassLok Tiles (wear & tear) 4m²

Installation Information

SGF

Installation Time 2 Person(s) 1.5 Hour(s)

Overall Weight 188.7kg

Heaviest Part 158.1kg

Largest Part 3.0m x 2.6m x 0.7m



Longest Part 3.0m

Concrete Required 0.15m³

Conforms to EN 1176

[Click here for more information & downloads](#)



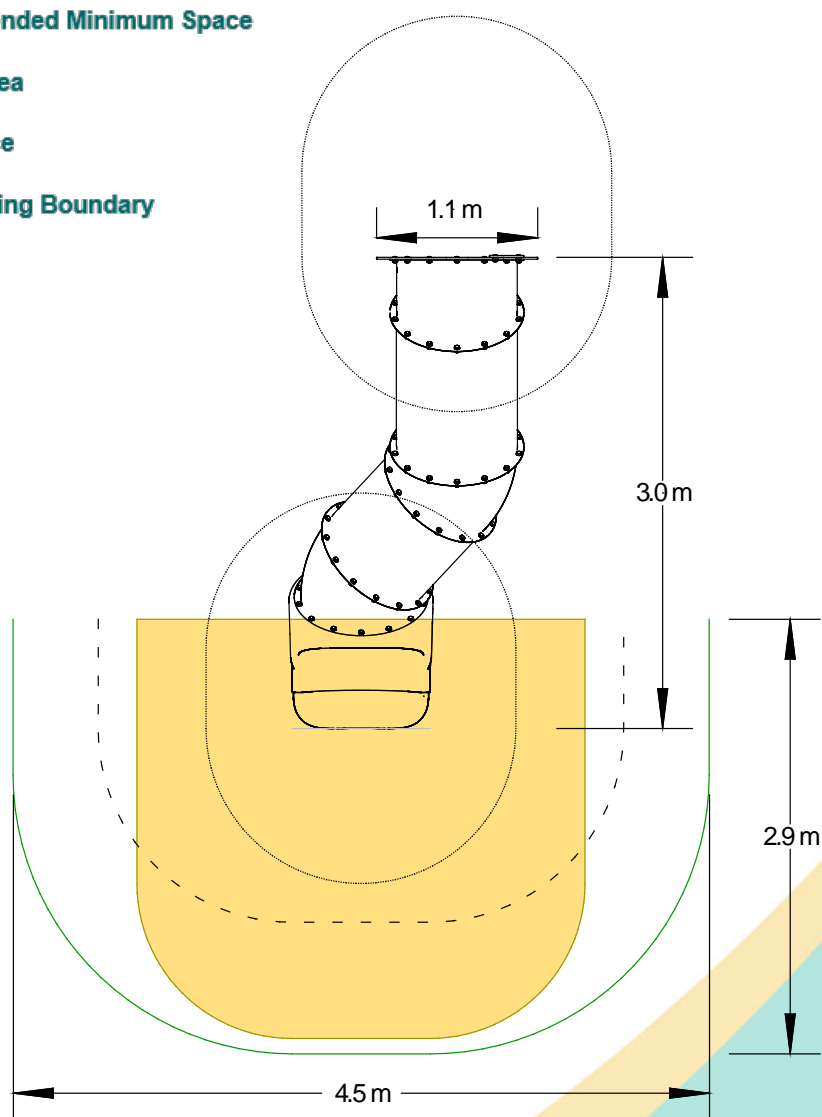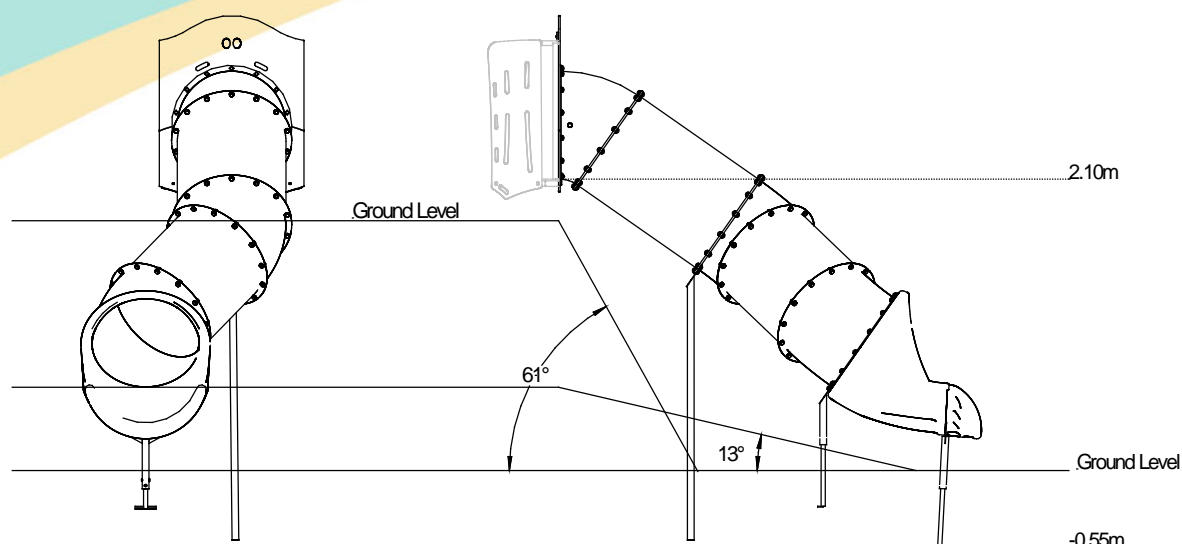


[Click here for more information & downloads](#)



Versatile Embankment Slide

- Plastic Tube 2.3m High

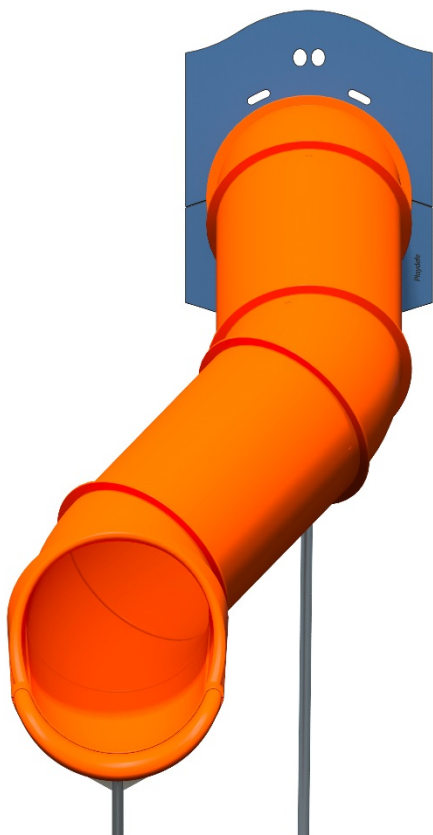

Code - EM-PT(2.30)

Age

2-12 years dependent on frame height and slide length

Materials

Stainless Steel

Coloured CGL

Various Coloured Plastics

Product Description

LLDPE plastic tube slide mounted to a coloured CGL frame, side panels and platform supported by solid stainless steel adjustable post. Innovative hand and foot steps made from textured CGL are attached to the adjustable post.

Technical Information

Equipment Dimensions

Length / Width / Height 3.3m x 3.2m x 1.0m

Surfacing and Area Required

Recommended Minimum Space L/W/H 2.9m x 4.5m x height dependant on tower used

Max Gradient of Ground 1 in 5 at runout

Free Height of Fall 1.0m at runout

Impact Area 7.4m²

Synthetic Area (i.e. EPDM / Wet Pour / Synthetic Grass etc.) 7.5m²

Loosefill at 150mm depth (i.e. Bark / Cushionfall / Sand) 2m³

GrassLok Tiles (wear & tear) 4m²

Installation Information

SGF

Installation Time 2 Person(s) 1.5 Hour(s)

Overall Weight 194.2kg

Heaviest Part 163.5kg

Largest Part 3.2m x 2.8m x 0.7m



Longest Part 3.2m

Concrete Required 0.15m³

Conforms to EN 1176

[Click here for more information & downloads](#)



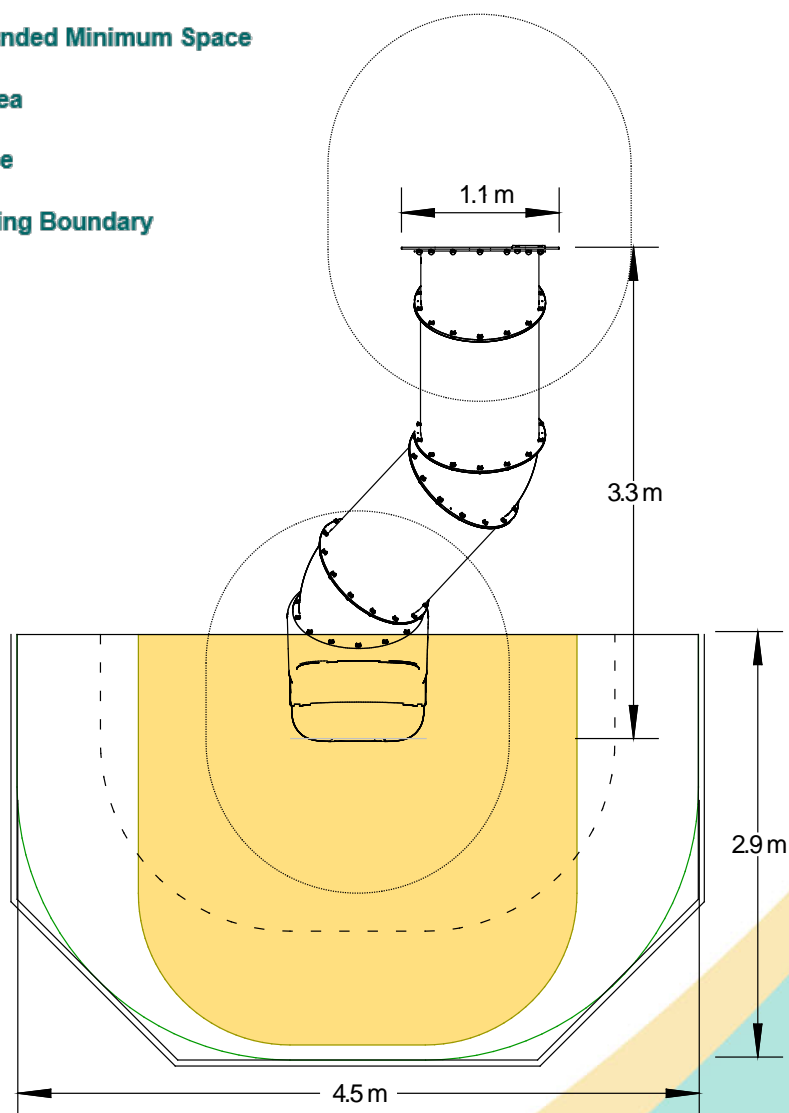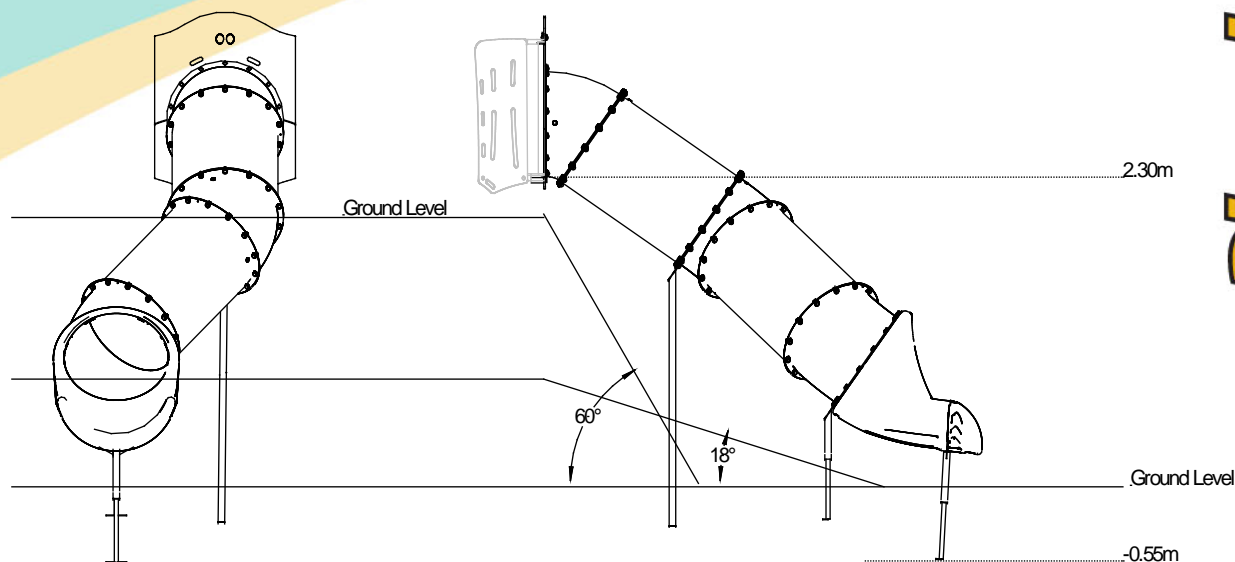


[Click here for more information & downloads](#)



Versatile Embankment Slide

- Plastic Tube 2.5m High

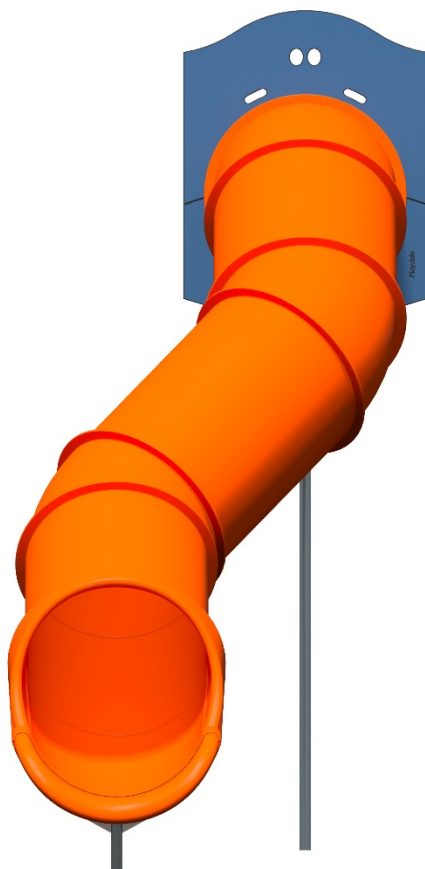

Code - EM-PT(2.50)

Age

2-12 years dependent on height and slide length

Materials

Stainless Steel

Coloured CGL

Various Coloured Plastics

Product Description

LLDPE plastic tube slide mounted to a coloured CGL frame, side panels and platform supported by solid stainless steel adjustable post. Innovative hand and foot steps made from textured CGL are attached to the adjustable post.

Technical Information

Equipment Dimensions

Length / Width / Height 3.6m x 3.5m x 1.0m

Surfacing and Area Required

Recommended Minimum Space L/W/H 2.9m x 4.5m x height dependant on tower used

Max Gradient of Ground 1 in 5 at runout

Free Height of Fall 1.0m at runout

Impact Area 7.4m²

Synthetic Area (i.e. EPDM / Wet Pour / Synthetic Grass etc.) 7.5m²

Loosefill at 150mm depth (i.e. Bark / Cushionfall / Sand) 2m³

GrassLok Tiles (wear & tear) 4m²

Installation Information

SGF

Installation Time 2 Person(s) 1.5 Hour(s)

Overall Weight 202.5kg

Heaviest Part 171.2kg

Largest Part 3.5m x 3.0m x 0.7m



Longest Part 3.5m

Concrete Required 0.15m³

Conforms to EN 1176

[Click here for more information & downloads](#)



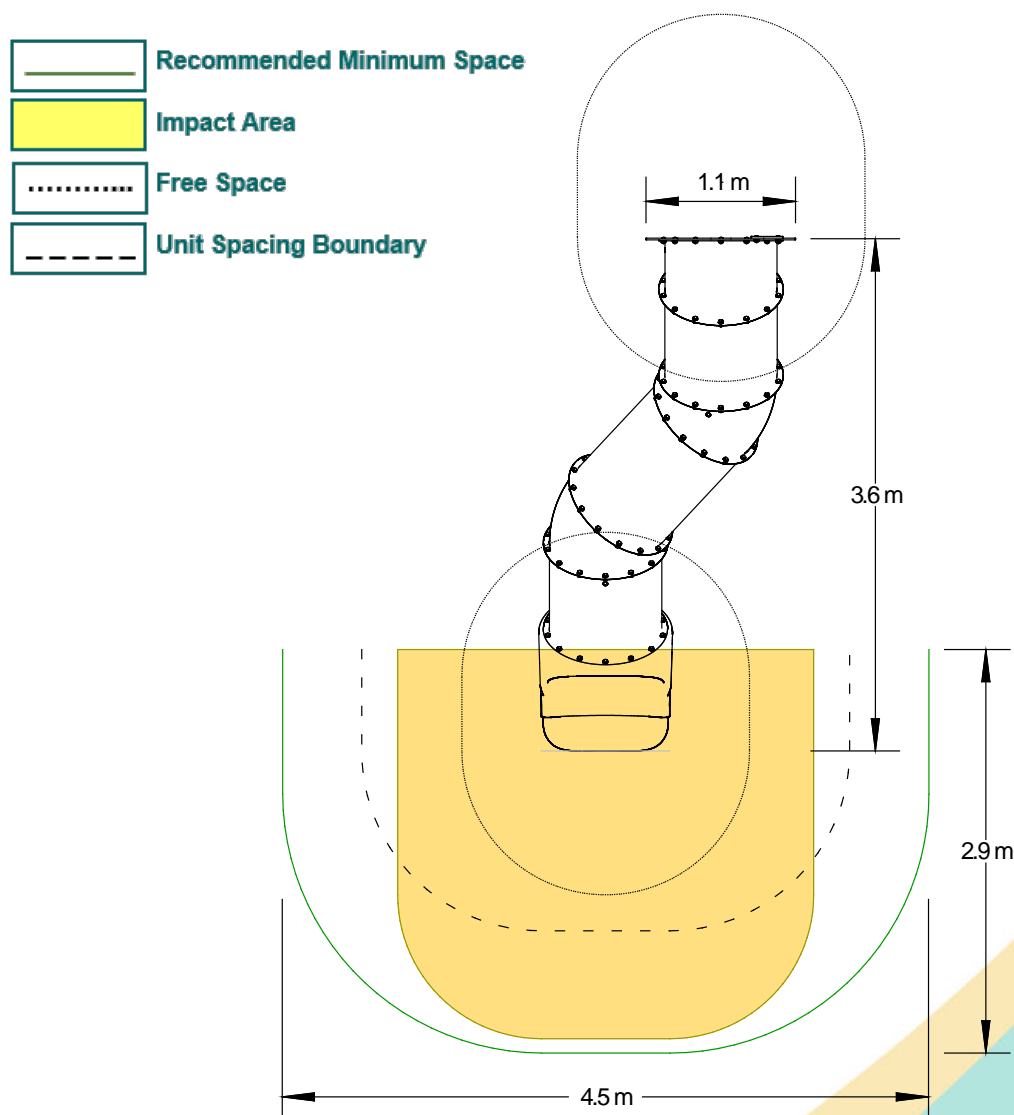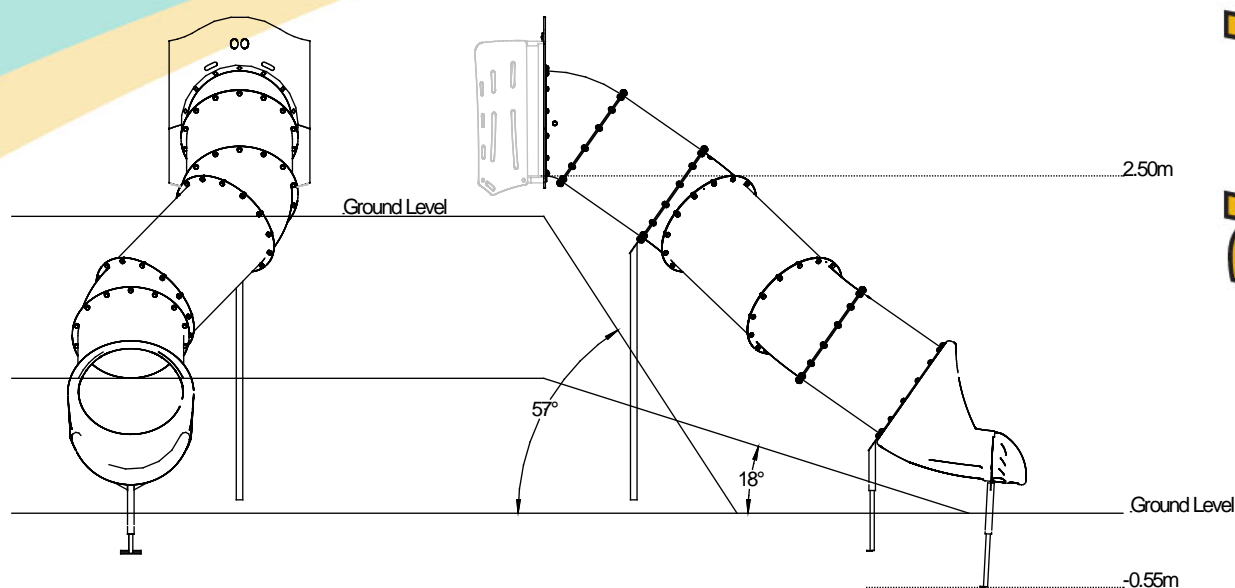


[Click here for more information & downloads](#)



Versatile Embankment Slide

- Plastic Tube 2.7m High

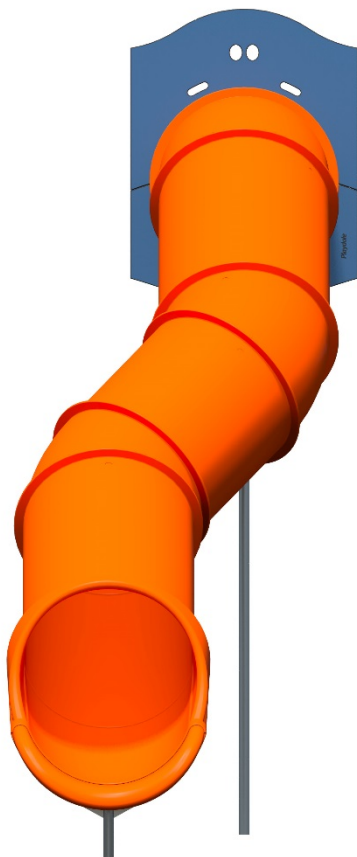

Code - EM-PT(2.70)

Age

2-12 years dependent on height and slide length

Materials

Stainless Steel

Coloured CGL

Various Coloured Plastics

Product Description

LLDPE plastic tube slide mounted to a coloured CGL frame, side panels and platform supported by solid stainless steel adjustable post. Innovative hand and foot steps made from textured CGL are attached to the adjustable post.

Technical Information

Equipment Dimensions

Length / Width / Height 3.6m x 3.5m x 1.0m

Surfacing and Area Required

Recommended Minimum Space L/W/H 2.9m x 4.5m x height dependant on tower used

Max Gradient of Ground 1 in 5 at runout

Free Height of Fall 1.0m at runout

Impact Area 7.4m²

Synthetic Area (i.e. EPDM / Wet Pour / Synthetic Grass etc.) 7.5m²

Loosefill at 150mm depth (i.e. Bark / Cushionfall / Sand) 2m³

GrassLok Tiles (wear & tear) 4m²

Installation Information

SGF

Installation Time 2 Person(s) 1.5 Hour(s)

Overall Weight 202.5kg

Heaviest Part 171.2kg

Largest Part 3.5m x 3.0m x 0.7m


Longest Part 3.5m

Concrete Required 0.15m³


Conforms to EN 1176

[Click here for more information & downloads](#)



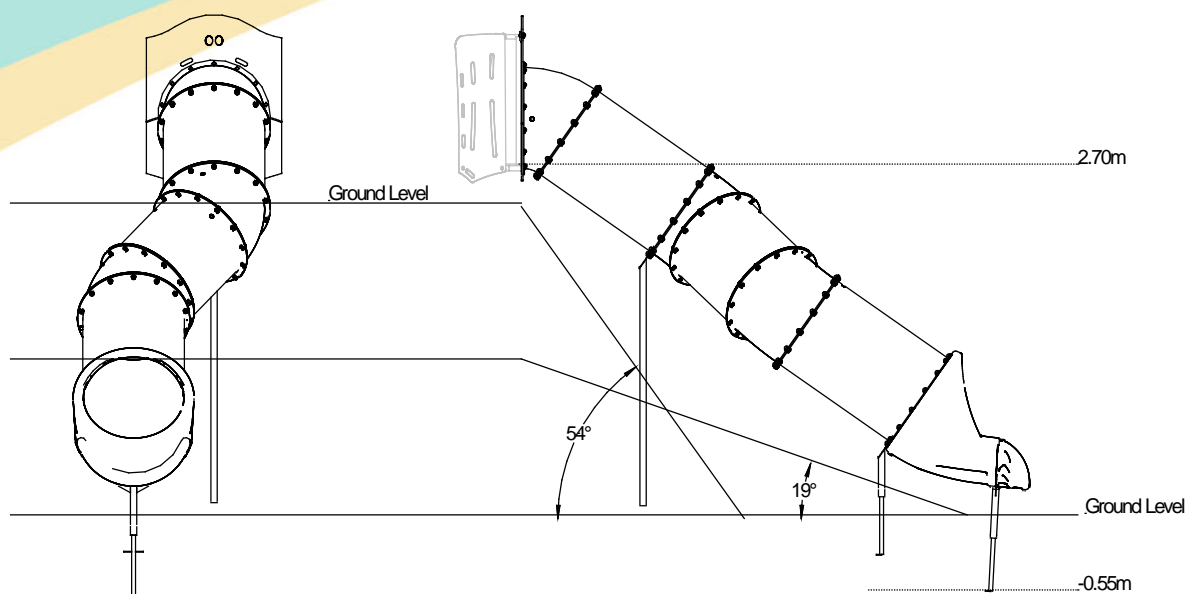

-  Recommended Minimum Space
-  Impact Area
-  Free Space
-  Unit Spacing Boundary

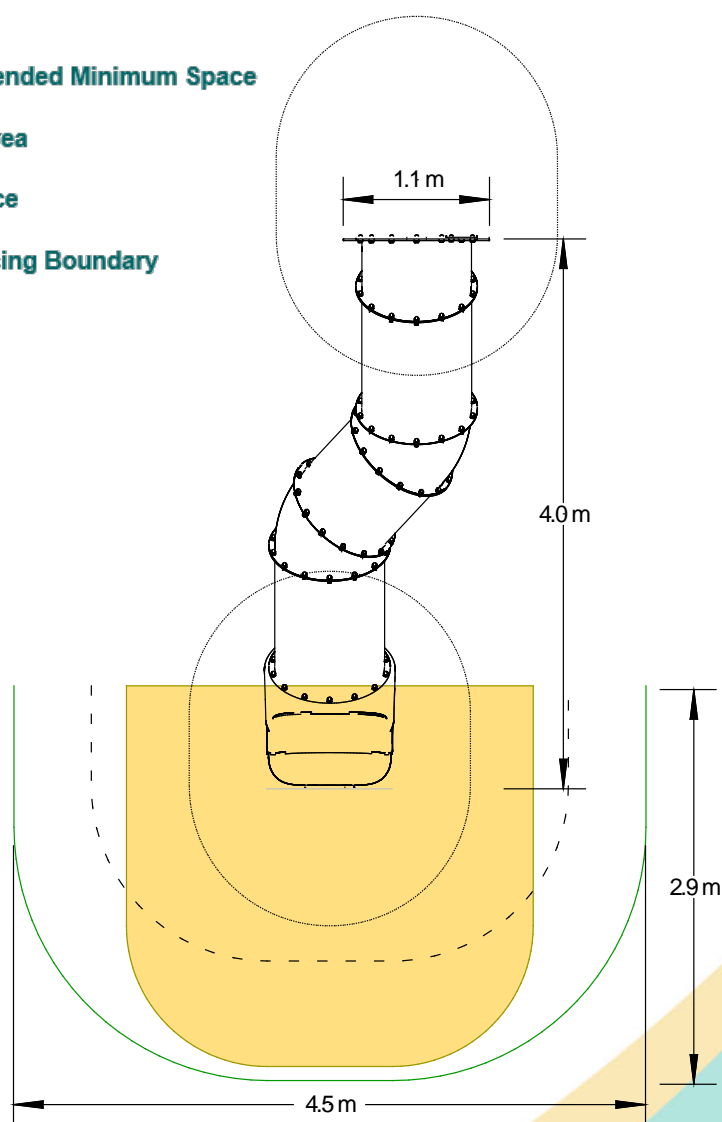


[Click here for more information & downloads](#)



Versatile Embankment Slide

- Plastic Tube 2.9m High

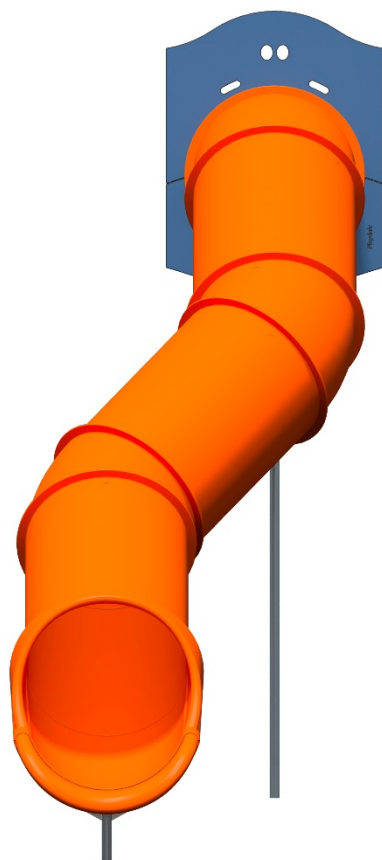

Code - EM-PT(2.90)

Age

2-12 years dependent on frame height and slide length

Materials

Stainless Steel

Coloured CGL

Various Coloured Plastics

Product Description

LLDPE plastic tube slide mounted to a coloured CGL frame, side panels and platform supported by solid stainless steel adjustable post. Innovative hand and foot steps made from textured CGL are attached to the adjustable post.

Technical Information

Equipment Dimensions

Length / Width / Height 3.9m x 4.1m x 1.0m

Surfacing and Area Required

Recommended Minimum Space L/W/H 2.9m x 4.5m x height dependant on tower used

Max Gradient of Ground 1 in 5 at runout

Free Height of Fall 1.0m at runout

Impact Area 7.4m²

Synthetic Area (i.e. EPDM / Wet Pour / Synthetic Grass etc.) 7.5m²

Loosefill at 150mm depth (i.e. Bark / Cushionfall / Sand) 2m³

GrassLok Tiles (wear & tear) 4m²

Installation Information

SGF

Installation Time 2 Person(s) 1.5 Hour(s)

Overall Weight 213.7kg

Heaviest Part 57.5kg

Largest Part 2.2m x 1.5m x 0.7m


Longest Part 2.2m

Concrete Required 0.15m³


Conforms to EN 1176

[Click here for more information & downloads](#)



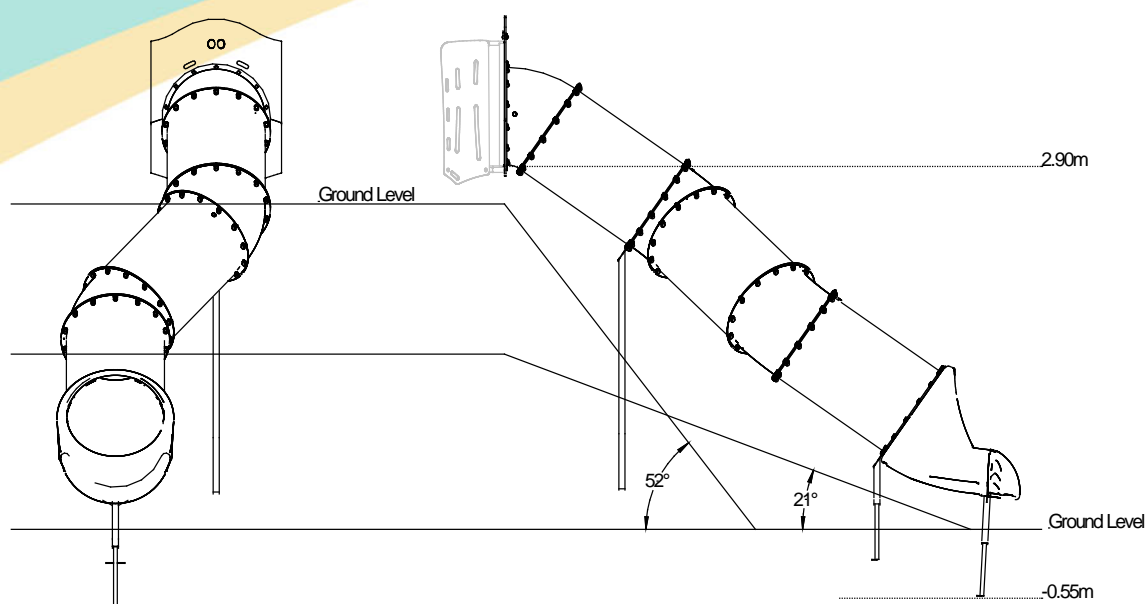

-  Recommended Minimum Space
-  Impact Area
-  Free Space
-  Unit Spacing Boundary

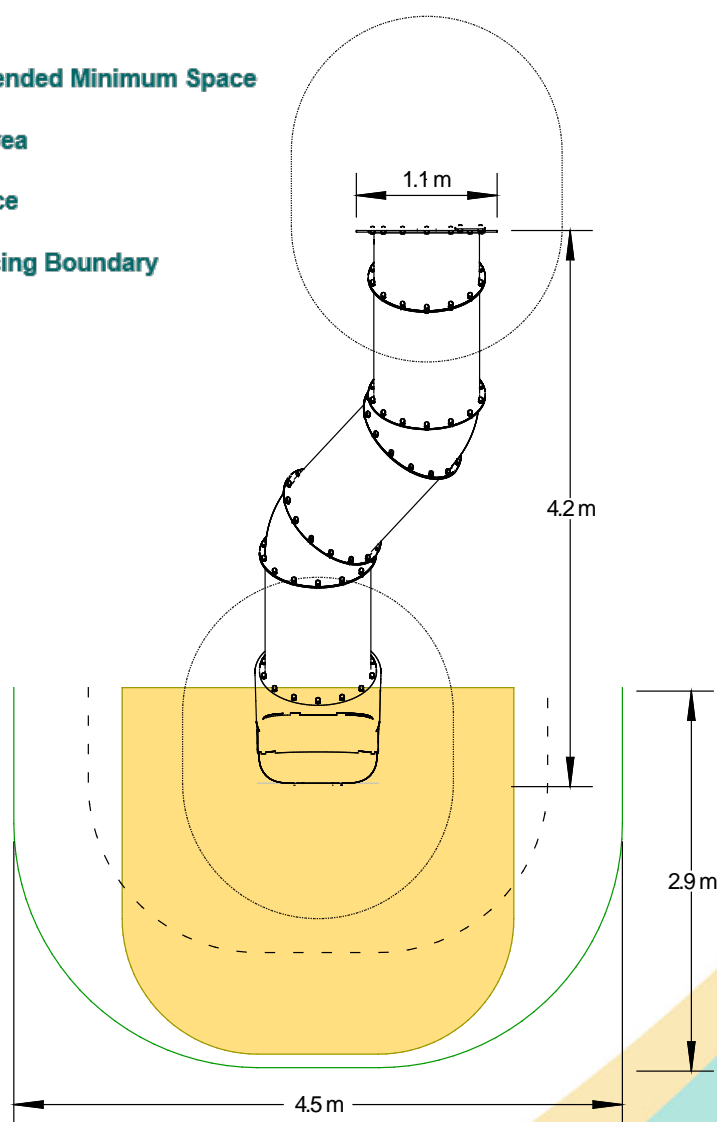


[Click here for more information & downloads](#)



Versatile Embankment Slide

- Plastic Tube 3.1m High

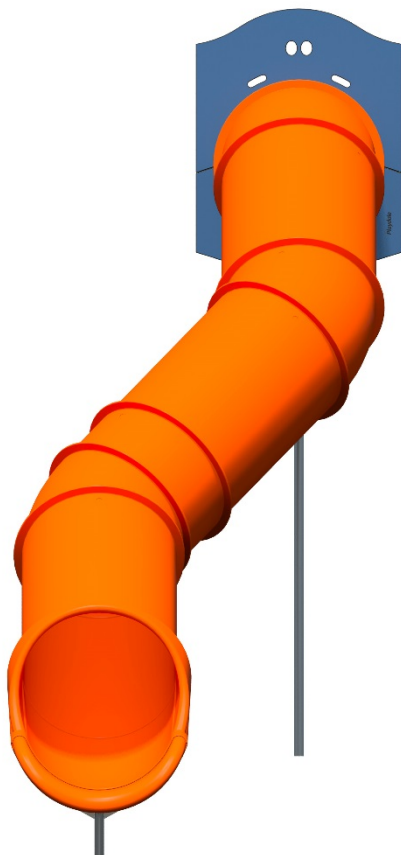

Code - EM-PT(3.10)

Age

2-12 years dependent on frame height and slide length

Materials

Stainless Steel

Coloured CGL

Various Coloured Plastics

Product Description

LLDPE plastic tube slide mounted to a coloured CGL frame, side panels and platform supported by solid stainless steel adjustable post. Innovative hand and foot steps made from textured CGL are attached to the adjustable post.

Technical Information

Equipment Dimensions

Length / Width / Height 4.2m x 4.3m x 1.0m

Surfacing and Area Required

Recommended Minimum Space L/W/H 2.9m x 4.5m x height dependant on tower used

Max Gradient of Ground 1 in 5 at runout

Free Height of Fall 1.0m at runout

Impact Area 7.4m²

Synthetic Area (i.e. EPDM / Wet Pour / Synthetic Grass etc.) 7.5m²

Loosefill at 150mm depth (i.e. Bark / Cushionfall / Sand) 2m³

GrassLok Tiles (wear & tear) 4m²

Installation Information

SGF

Installation Time 2 Person(s) 1.5 Hour(s)

Overall Weight 221.4kg

Heaviest Part 65kg

Largest Part 2.5m x 1.6m x 0.7m


Longest Part 2.5m

Concrete Required 0.15m³


Conforms to EN 1176

[Click here for more information & downloads](#)



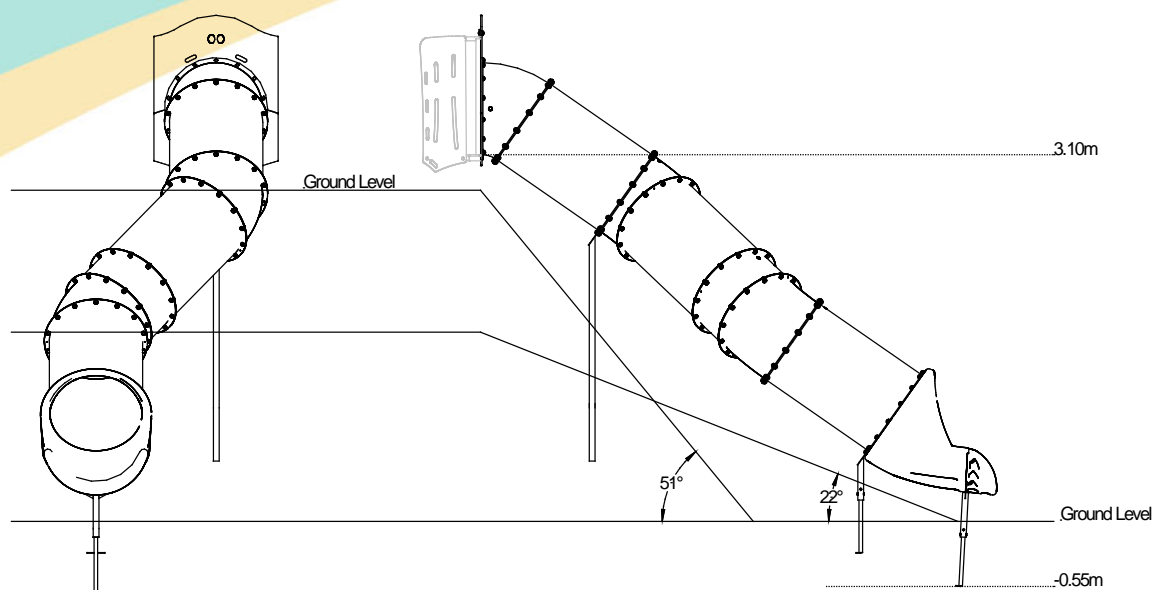

-  Recommended Minimum Space
-  Impact Area
-  Free Space
-  Unit Spacing Boundary

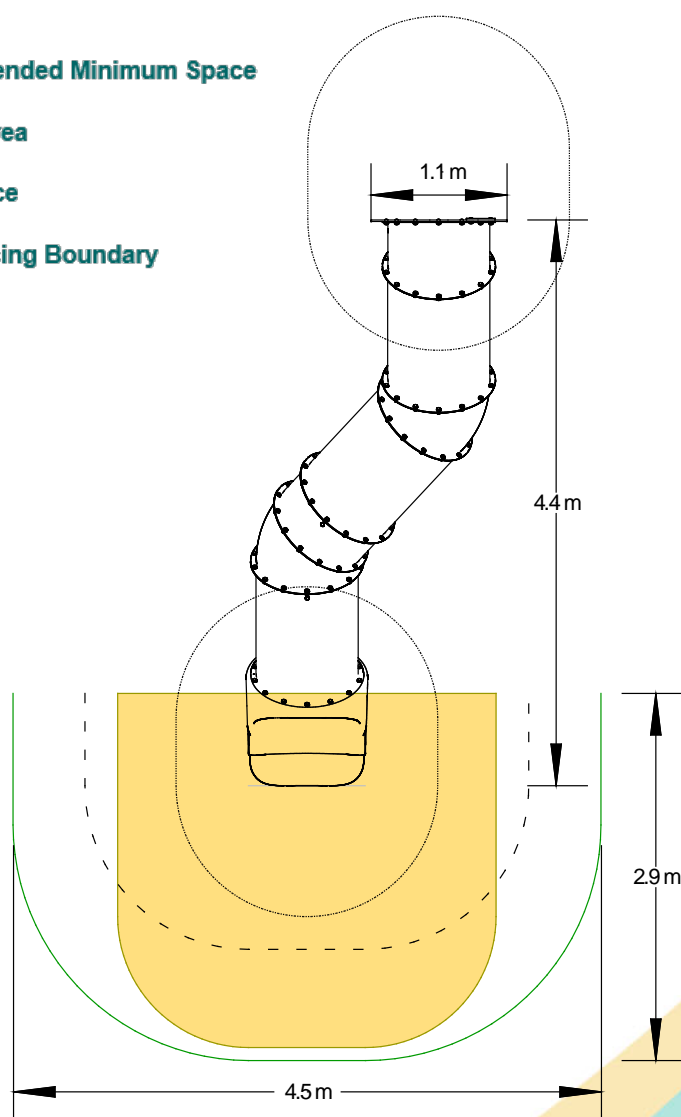

[Click here for more information & downloads](#)

