


Straight Tunnel – UT/STR



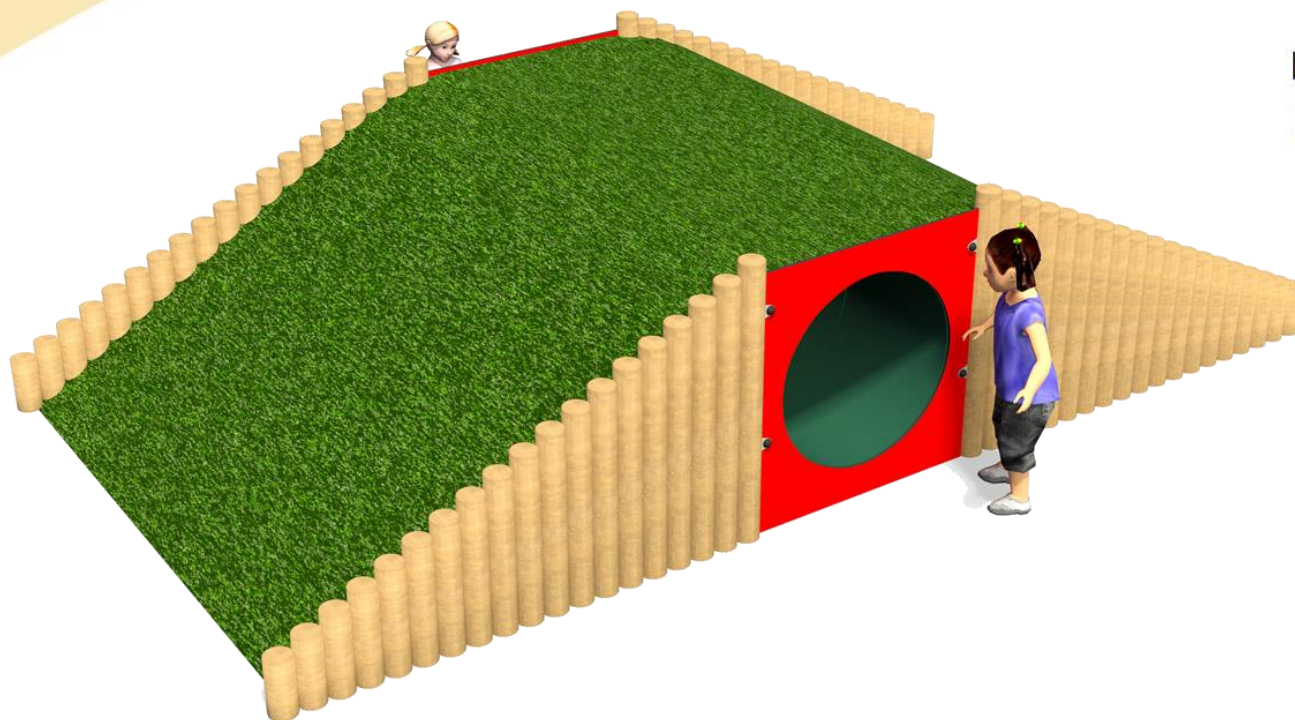


Do not use more than 100mm total depth of substrate on top of tunnel.

Technical Information	
Equipment Dimensions	
Length / Width / Height	4.7m x 2.2m x 1.1m
Surfacing and Area Required	
Minimum Space Required L/W/H	7.8m x 5.3m x 3.6m
Max Gradient Of Ground	1 in 50
Free Height Of Fall	1.1m
Impact Area	39m ² (Approx.)
Loosefill At 250mm	N/A
Bark / Cushionfall / Sand	N/A
Approximate Area Of Mound For Surfacing	10.7m ²
Total Infill Required	4.8m ³
Installation Information	
overall weight	423 kg
heaviest part	77 kg
largest part	2.2m x 0.9m x 0.9m
longest part	2.2m
concrete required	0.4m ³
Conforms to BS EN 1176.	

[Click here for more information & downloads](#)



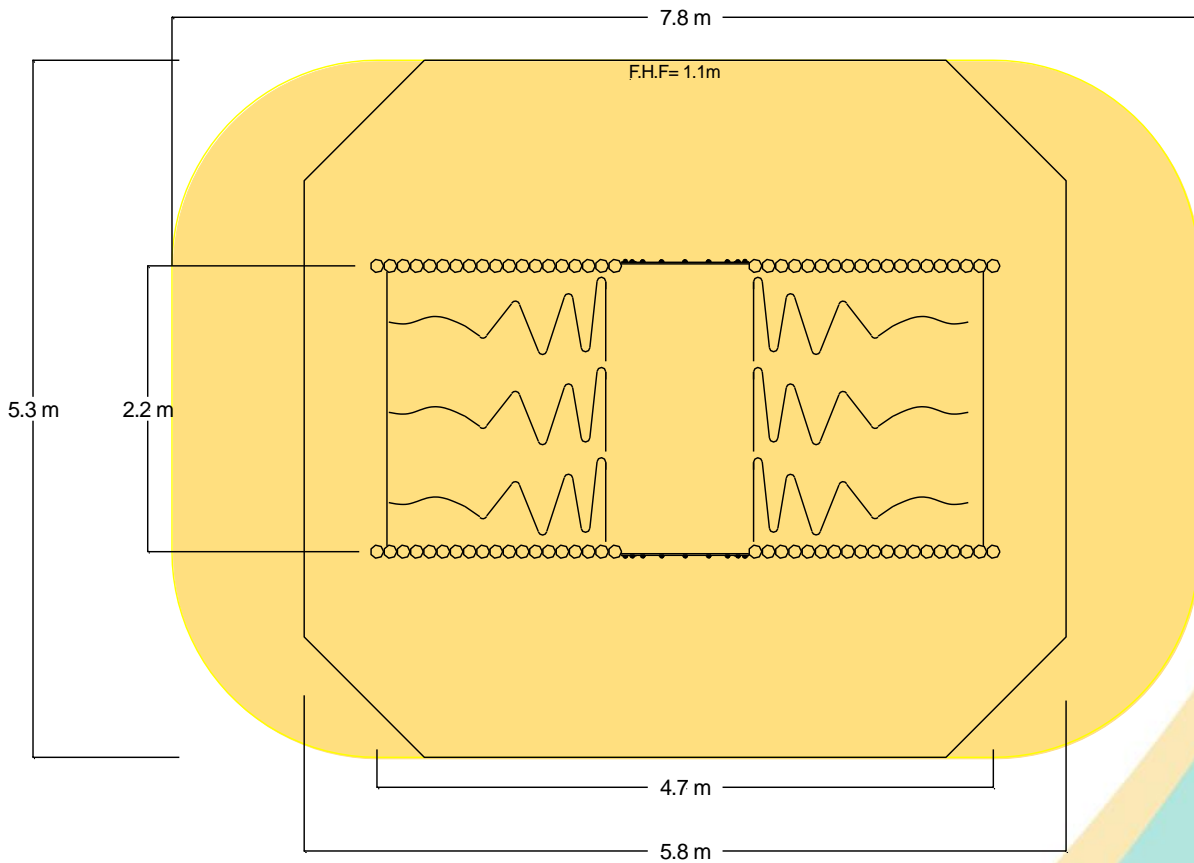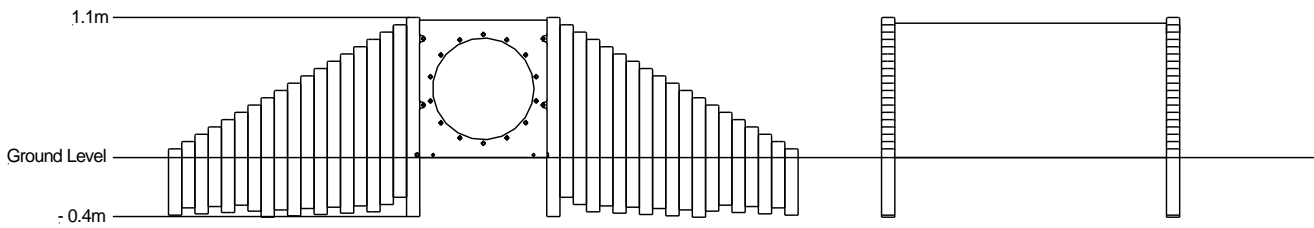

Note: These units are not suitable for use with Loosefill surfacing

[Click here for more information & downloads](#)