



**1145EPON**




## Description

1 tower with roof, 1 tower with gable roof, 1 triangular platform, 2 square platforms, 1 tubular bridge, 1 long slide, 1 deep slide, 2 walls with decorative cuts, 7 safety HDPE boards with decorative cuts, 2 square landings, 3 entrance, 5 climbing bars, 2 metal bars over the slide, 13 metal fittings to be installed in the ground

**Model type**  
**Serial number**  
**Equipment name**

Modulair  
1145EPON  
Tower 18 1145

*Join the action!*

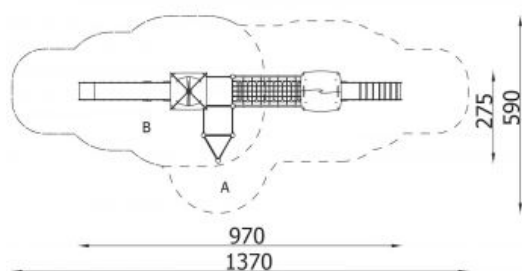

<b>Product line</b>	Action Orbis Wood Modulair
<b>Age range</b>	3 - 14
<b>Unit measurements</b>	275cm x 970cm x 379cm
<b>Required surface area</b>	590cm x 1370cm
<b>Impact area</b>	51.5m <sup>2</sup>
<b>Free height of fall</b>	180cm

**Material**

Bearing posts have a diameter of 12 cm and are made of glue-laminated, round, wood, fixed 10 cm above the ground level with metal anchors.

Antislip platforms.

Roofs, security elements and panels are made of HDPE (high durable polyethylene) boards with pattern cuttings.


Sliding surface is made of acid-proof, stainless steel sheet.

Ropes made of polypropylene with a steel core, thickness 16-18 mm, vandalism and UV resistant.

All fittings and connectors are weather and UV resistant.

Wood elements are oiled or covered with a colour glaze.

Steel elements are protected against corrosion by zinc layer and powder paint coating.

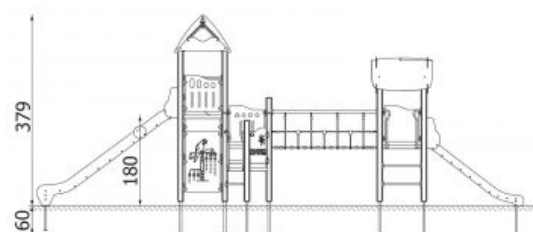

<b>Heaviest part</b>	120kg
<b>Largest part</b>	80cm - 450cm
<b>Spare parts</b>	Available
<b>Installation time without grondwork</b>	18 hour(s) / 3 person(s)
<b>Special tools</b>	Included

**Anchoring**

Poles are fixed in the ground at a depth of 60 cm on steel anchors. Concrete according to the assembly instructions.

**Remarks**

This equipment is also available with hot dip galvanized posts. Prices on request.