
10049 LITTLE CLIMBING WALL

Agility collection



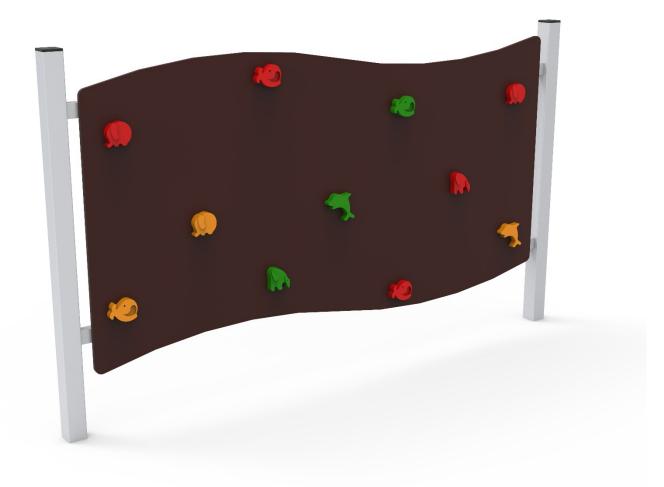

TECHNICAL DATA:

Not easily accessible device, according to standard EN 1176-1:2017

Device dimensions:	2,6
Device height:	1,50
Minimum space:	5,6
Falling area:	15,
Critical fall height:	1,5
Foundations depth:	


2,66 x 0,11m 1,56m 5,66 x 3,11m 15,66m² 1,50m -0,60m

The device according to EN 1176-1:2012 Playground equipment and surfacing – Part 1: General safety requirements and test methods

Safety surfaces:

- sand, gravel, bark, synthetic surface
- minimal thickness for loose particulate materials 200+100mm
- synthetic surface according to critical fall height

Top view with falling area

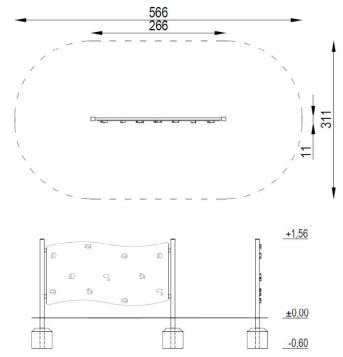

COMPONENTS:		MATERIALS:	
Supporting construction Vertical climbing wall	1 рс 1 рс	Construction poles:	steel square profiles, galvanized, powder coated in gray
		Steel elements:	galvanized steel, powder coated
		Climbing walls:	waterproof plywood, climbing grips based on resins
		Caps:	plastic
		Foundations:	concrete min. C12/15 standard



SATERNUS DISTRIBUTION Sp. z o.o. sp.k. ul. Nowa 32 41-500 Chorzów, Poland

Certificate beholder: Producer: Distributor: GRUPA SATERNUS Sp. z o.o. S. K. A. reserves all rights to protect copyright under the Act of February 4, 1994 on Copyright and Related Rights (Journal of Laws No. 28, pc 83), and in particular Art. 78 and 79 of this Law.

GRUPA SATERNUS Sp. z o.o. S. K. A. Saternus Production Sp. z o.o. sp. k. Saternus Distribution Sp. z o.o. sp. k.