


1611 SWING FOR THE DISABLED



TECHNICAL DATA:


Device dimensions:	2,08m x 3,07m
Device height:	2,65m
Minimum space:	4,47 x 8,54m
Falling area:	31,50 m ²
Critical fall height:	not applicable
Depth of foundations :	-0,60m

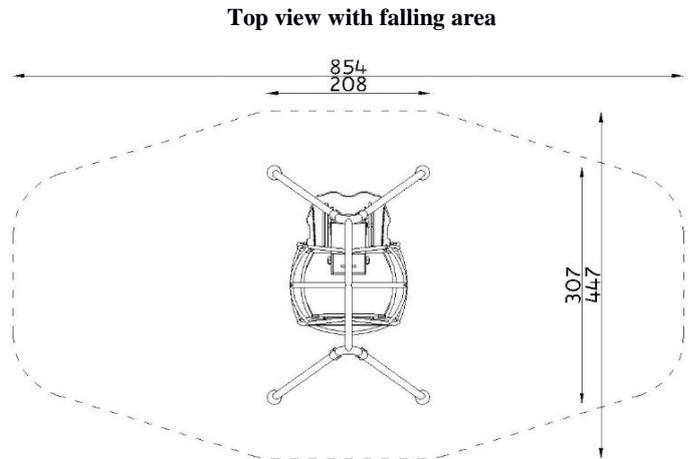

The device according to EN 1176-1:2012
 Playground equipment and surfacing – Part 1:
 General safety requirements and test methods.

Safety surfaces:

- turf/topsoil, sand, gravel, bark, synthetic surface
- minimal thickness for loose particulate materials 200+100mm
- synthetic surface according to critical fall height

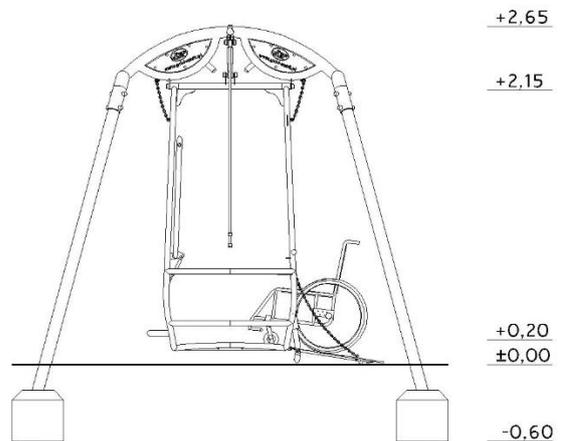

MATERIALS:

Construction poles:	steel square profiles, galvanized, powder coated in grey
Steel elements:	galvanized steel, powder coated
Platform:	corrugated aluminum sheet
Chain:	galvanized steel
Ropes:	polypropylene steel braided with rubber handle
Shock Absorbers:	pneumatic
Covers:	plastic
Foundations:	concrete class min. C12/15



SATERNUS DISTRIBUTION Sp. z o.o. sp.k.
ul. Nowa 32
41-500 Chorzów, Poland

Certificate beholder:
Producer:
Distributor:

GRUPA SATERNUS Sp. z o.o. S. K. A. reserves all rights to protect copyright under the Act of February 4, 1994 on Copyright and Related Rights (Journal of Laws No. 28, item 83), and in particular Art. 78 and 79 of this Law.

GRUPA SATERNUS Sp. z o.o. S. K. A.
Saternus Production Sp. z o.o. sp. k.
Saternus Distribution Sp. z o.o. sp. k.