

TECHNICAL DATA:

Not easy accessible device, according to standard EN 1176-1:2017


Device dimensions:7,18 x 4,91mDevice height:4,65mMinimum space:10,60 x 8,23mFalling area:45,05m²Critical fall height:2,20mFoundations depth:-0,60m

The device according to EN 1176-1:2017 Playground equipment and surfacing – Part 1: General safety requirements and test methods

Safety surfaces: sand, gravel, bark, synthetic surface

- minimal thickness for loose particulate materials 300+100mm
- synthetic surface according to critical fall height

Top view with falling area

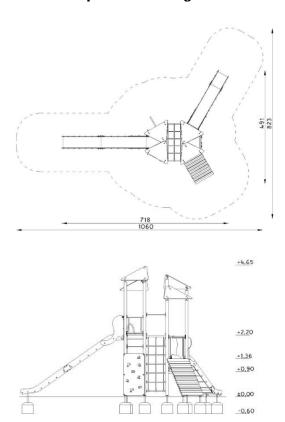

COMPONENTS:		MATERIALS:	
Triangular tower without roof, platform 0,90m: Triangular tower without roof, platform 2,10m:	1 pc 1 pc	Construction poles:	galvanized steel pipes, powder coated in gray
Triangular tower with roof, platform 1,36m: Triangular tower with roof, platform 1,50m: Slope gangway 1,36m:	2 pcs 2 pcs 1 pc	Anchors: galvanized steel Flat decorative elements: HDPE sheets,	galvanized steel
Climbing wall 0,90m: Climbing wall 1,50m: Vertical ladder:	1 pc 1 pc 1 pc 7 pcs	Platforms, gangways:	waterproof plywood, coated with anti-slip layer, based on steel structure
Slide 1,36m: Slide 2,10m:	1 pc 1 pc	Steel elements:	galvanized steel, powder coated
Fireman's pole 1,50m: Vertical rope net: Horizontal rope net:	1 pc 2 pcs 1 pc	Surface of slope slide: Climbing walls:	stainless steel, waterproof plywood, climbing grips, based on resins
		Ropes:	polypropylene braided with a steel, interconnected by plastic fasteners
		Caps: Foundations:	Plastic concrete min. C12/15 standard



SATERNUS DISTRIBUTION Sp. z o.o. sp.k. ul. Nowa 32 41-500 Chorzów, Poland

Certificate beholder: Producer: Distributor: GRUPA SATERNUS Sp. z o.o. S. K. A. reserves all rights to protect copyright under the Act of February 4, 1994 on Copyright and Related Rights (Journal of Laws No. 28, item 83), and in particular Art. 78 and 79 of this Law.

GRUPA SATERNUS Sp. z o.o. S. K. A. Saternus Production Sp. z o.o. sp. k. Saternus Distribution Sp. z o.o. sp. k.