

TECHNICAL DATA:

Not easily accessible device, according to standard EN 1176-1:2017

Device dimensions: 6,74 x 5,23m

Device height: 3,70m

Minimum space: 10,68 x 8,23m

Falling area: 67,11m²

Critical fall height: 2,20m


Foundations depth: -0,60m

The device according to EN 1176-1:2012 Playground equipment and surfacing – Part 1: General safety requirements and test methods

Safety surfaces:

- sand, gravel, bark, synthetic surface
- minimal thickness for loose particulate materials 300+100mm
- synthetic surface according to critical fall height

Top view with falling area

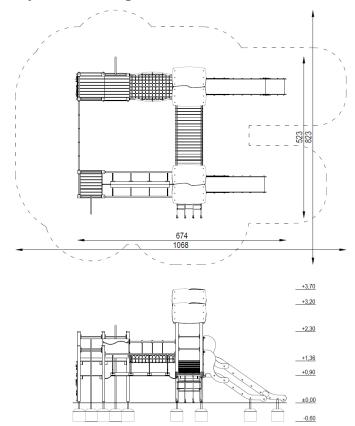

COMPONENTS:		MATERIALS:	
Tower without roof, platform 0,90m Tower without roof, platform 1,36m	1 pc 2 pcs	Construction poles:	glued laminated pine timber, varnish painted dark brown
Tower with roof, platform 0,90m Tower with roof, platform 1,36m Vertical climbing wall 1,36m Entry rope net 0,90m Vertical ladder	1 pc	Anchors: Flat decorative elements: Platforms, gangways:	galvanized steel HDPE sheets impregnated pinewood boards, with machined anti-skid surface
Slide 0,90m Slide 1,36m	1 pc	Steel elements: Surface of slide:	galvanized steel, powder coated stainless steel
Fireman's pole 0,90m Fireman's pole 1,36m	•	Climbing walls:	waterproof plywood, climbing grips based on resins
Rope bridge Slope bridge	1 pc	Ropes:	polypropylene braided with a steel, interconnected by plastic fasteners
Mobile bridge Vertical rope net	1 pc 1 pc	Caps: Foundations:	plastic concrete min. C12/15 standard



SATERNUS DISTRIBUTION Sp. z o.o. sp.k. ul. Nowa 32 41-500 Chorzów, Poland

Certificate beholder: Producer: Distributor: GRUPA SATERNUS Sp. z o.o. S. K. A. reserves all rights to protect copyright under the Act of February 4, 1994 on Copyright and Related Rights (Journal of Laws No. 28, pc 83), and in particular Art. 78 and 79 of this Law.

GRUPA SATERNUS Sp. z o.o. S. K. A. Saternus Production Sp. z o.o. sp. k. Saternus Distribution Sp. z o.o. sp. k.