



TECHNICAL DATA:

Easily accessible device,
according to standard EN 1176-1:2017


Top view with falling area

Device dimensions:	2,80 x 0,88m
Device height:	1,15m
Minimum space:	5,80 x 3,88m
Falling area:	20,67m ²
Critical fall height:	0,40m
Foundations depth:	-0,60m

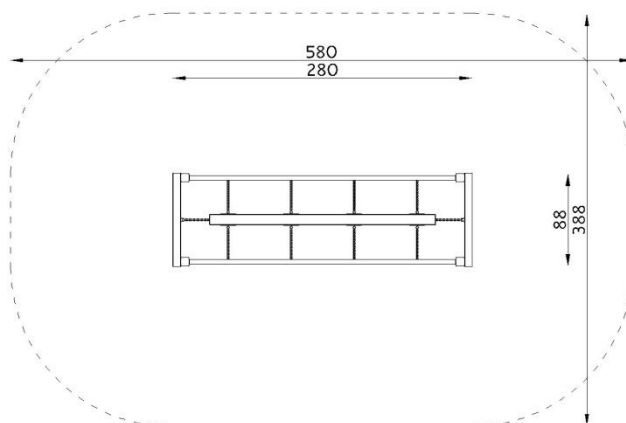

The device according to EN 1176-1:2017
Playground equipment and surfacing – Part 1:
General safety requirements and test methods

Safety surfaces:
- turf/topsoil, sand, gravel, bark, synthetic surface
- minimal thickness for loose particulate materials 200+100mm
- synthetic surface according to critical fall height

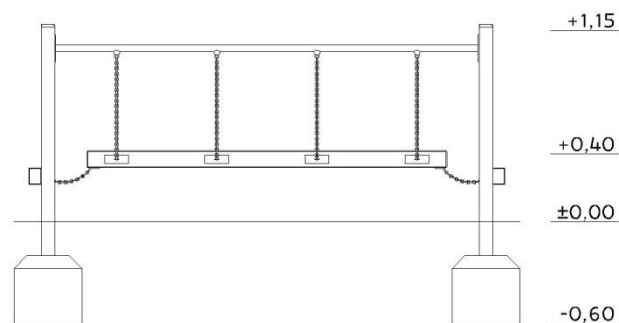

COMPONENTS:

Suspended balance beam

1 pc

MATERIALS:

Construction poles:

steel square profiles, galvanized,
powder coated in gray

Beam:

impregnated pinewood boards,
with machined anti-skid surface

Anchors:

galvanized steel

Steel elements:

galvanized steel, powder coated

Chain:

calibrated, made of galvanized steel

Caps:

plastic

Foundations:

concrete min. C12/15 standard



SATERNUS DISTRIBUTION Sp. z o.o. sp.k.
ul. Nowa 32
41-500 Chorzów, Poland

Certificate holder:
Producer:
Distributor:

GRUPA SATERNUS Sp. z o.o. S. K. A. reserves all rights to protect copyright under the Act of February 4, 1994 on Copyright and Related Rights (Journal of Laws No. 28, item 83), and in particular Art. 78 and 79 of this Law.

GRUPA SATERNUS Sp. z o.o. S. K. A.
Saternus Production Sp. z o.o. sp. k.
Saternus Distribution Sp. z o.o. sp. k.