







TECHNICAL DATA:

Easily accessible device, according to standard EN 1176-1:2017


Device dimensions: 3,54 x 1,09m
Device height: 3,20m
Minimum space: 6,85 x 3,88m
Falling area: 21,28m²
Critical fall height: 0,90m
Foundations depth: -0,60m

The device according to EN 1176-1:2017 Playground equipment and surfacing – Part 1: General safety requirements and test methods

Safety surfaces:

- turf/topsoil, sand, gravel, bark, synthetic surface
- minimal thickness for loose particulate materials 200+100mm
- synthetic surface according to critical fall height

Top view with falling area

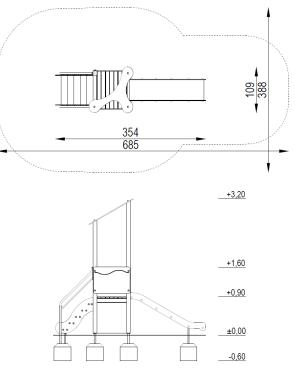

COMPONENTS: MATERIALS: Tower with roof, platform on 0,90m Construction poles: 1 pc glued laminated pine timber, rounded at the edges, Entry stairs, height 0,90m 1 pc varnish painted dark brown Slide, height 0,90m 1 pc Anchors: galvanized steel Flat decorative elements: HDPE sheets Platforms, gangway: impregnated pinewood boards, with machined anti-skid surface Steel elements: galvanized steel, powder coated Surface of slide: stainless steel Caps: plastic Foundations: concrete min. C12/15 standard



SATERNUS DISTRIBUTION Sp. z o.o. sp.k. ul. Nowa 32 41-500 Chorzów, Poland

Certificate beholder: Producer: Distributor: GRUPA SATERNUS Sp. z o.o. S. K. A. reserves all rights to protect copyright under the Act of February 4, 1994 on Copyright and Related Rights (Journal of Laws No. 28, item 83), and in particular Art. 78 and 79 of this Law.